

# NORTHERN NEVADA WATER PLANNING COMMISSION AGENDA

Wednesday, March 4, 2015

1:30 p.m.

Washoe County Commission Chambers  
1001 East Ninth Street  
Reno, Nevada

## Notes:

1. Items on this agenda on which action may be taken are followed by the term "for possible action". Non-action items are followed by an asterisk (\*).
2. Public comment is limited to three minutes per speaker and is allowed during the public comment periods, and before action is taken on any action item. Comments are to be directed to the Commission as a whole. Persons may not allocate unused time to other speakers. The public may sign-up to speak during the public comment period or on a specific agenda item by completing a "Request to Speak" card and submitting it to the clerk.
3. Items on this agenda may be taken out of order, combined with other agenda items for consideration, removed from the agenda, or delayed for discussion at any time. Arrive at the meeting at the posted time to hear item(s) of interest.
4. Supporting material provided to the Commission for the items on the agenda is available to members of the public at the Northern Nevada Water Planning Commission ("NNWPC") offices, 4930 Energy Way, Reno, NV, from June Davis, Administrative Secretary, (775) 954-4665, and on the NNWPC website at <http://www.nnwpc.us>
5. In accordance with NRS 241.020, this agenda closes three working days prior to the meeting. We are pleased to make reasonable accommodations for persons who are disabled and wish to attend meetings. If you require special arrangements for the meeting, please call 954-4665 no later than 24 hours prior to the meeting.
6. In accordance with NRS 241.020, this agenda has been posted at the following locations: Reno City Hall (1 East First Street), Sparks City Hall (431 Prater Way), Sparks Justice Court (1675 East Prater Way), Sun Valley GID (5000 Sun Valley Blvd.), TMWA (1355 Capital Blvd.), Washoe County Administration Building (1001 E. 9th Street), Second Judicial District Court/Courthouse (75 Court Street), Washoe County Central Library (301 South Center St.), Washoe County Community Services Department (4930 Energy Way), Galena Market (19990 Thomas Creek Rd.), Galena High School (3600 Butch Cassidy Way), South Valleys Library (15650A Wedge Parkway), the NNWPC website: <http://www.nnwpc.us> and the State of Nevada Website: <https://notice.nv.gov>

1. Roll Call and determination of presence of a quorum. \*
2. Public Comments. \* (Three-minute time limit per person.)
3. Approval of agenda. **(For Possible Action)**
4. Approval of the minutes from the February 4, 2015, meeting. **(For Possible Action)**
5. Review of projects funded by the Regional Water Management Fund ("RWMF") and Western Regional Water Commission ("WRWC") budget priorities for fiscal year 2015 - 2016; discussion and possible direction to staff – Jim Smitherman, Northern Nevada Water Planning Commission ("NNWPC") Water Resources Program Manager. **(For Possible Action)**
6. Presentation of staff comments on the "Flood Management and Storm Water Drainage" chapter for the 2016 Regional Water Management Plan ("RWMP") update; discussion and possible direction to staff – Jim Smitherman. **(For Possible Action)**
7. Presentation of comments received on the "Water Purveyors" chapter for the 2016 RWMP update; discussion and possible direction to staff – Chris Wessel, NNWPC Water Management Planner. **(For Possible Action)**

8. Presentation of comments received on the "Conservation" chapter for the 2016 RWMP update; discussion and possible direction to staff – Chris Wessel. **(For Possible Action)**
9. Discussion and possible direction to staff regarding any chapters of the RWMP previously reviewed by the NNWPC in relation to the 2016 RWMP update – Jim Smitherman. **(For Possible Action)**
10. Report on legislative activities, including Bill Draft Requests and Bills pending in the 2015 session of the Nevada Legislature that may affect or are of interest to the WRWC / NNWPC, John Rhodes, NNWPC Legal Counsel. \*
11. Program Manager's Report – Jim Smitherman. \*
  - a. Report on the Status of Projects and Work Plan Supported by the Regional Water Management Fund ("RWMF");
  - b. Financial Report on the RWMF; and
  - c. Report on the Truckee Meadows Regional Planning Agency's parcel-based population and employment modeling project.
12. Discussion regarding possible agenda items for the April 1, 2015 NNWPC meeting, and other future meetings, and possible direction to staff – Jim Smitherman. **(For Possible Action)**
13. Selection of NNWPC Chairman and Vice-Chairman for the term April 2015 to April 2016, and possible direction to staff. **(For Possible Action)**
14. Commission comments. \*
15. Staff comments. \*
16. Public Comments. \* (Three-minute time limit per person.)
17. Adjournment. **(For Possible Action)**

\*Indicates a non-action item

**DRAFT - MINUTES**  
**NORTHERN NEVADA WATER PLANNING COMMISSION**

**Wednesday, January 7, 2015**

The regular meeting of the Northern Nevada Water Planning Commission ("NNWPC") was held in the Washoe County Commission Chambers, 1001 East Ninth Street, Reno, Nevada and conducted the following business:

The meeting was called to order by Chairman Drinkwater at 1:30 p.m.

**1. Roll Call and Determination of Presence of a Quorum**

*Voting Members Present:* Michael Drinkwater, Darrin Price, George Ball, Michael DeMartini, John Erwin, John Flansberg, Mickey Hazelwood, Danielle Henderson, John Enloe, and David Solaro.

*Voting Members Absent:* Brian Wadsworth and John Martini.

*Non-Voting Members Present:* Chris Anderson, Kim Davis, My-Linh Nguyen, and Edmund Quaglieri.

*Non-Voting Members Absent:* Harry Fahnestock.

*Staff Members Present:* Jim Smitherman; Chris Wessel; June Davis; and John Rhodes, Legal Counsel.

**2. Public Comment**

None

**3. Approval of the Agenda (For Possible Action)**

COMMISSIONER PRICE MADE A MOTION TO APPROVE THE AGENDA, SECONDED BY COMMISSIONER BALL. THE MOTION CARRIED UNANIMOUSLY WITH TEN (10) MEMBERS PRESENT.

**4. Approval of the Minutes from the January 7, 2015, Meeting (For Possible Action)**

COMMISSIONER ERWIN MADE A MOTION TO APPROVE THE JANUARY 7, 2015, MINUTES, SECONDED BY COMMISSIONER PRICE. THE MOTION CARRIED WITH SEVEN (7) IN FAVOR AND THREE (3) ABSTENTIONS BY COMMISSIONERS JOHN ENLOE, MICKEY HAZELWOOD, AND DANIELLE HENDERSON.

**5. Report on government authority concerning domestic well water quality; discussion and possible direction to staff – Chris Anderson, P.E., Washoe County Health District. (For Possible Action)**

Chris Anderson presented information regarding domestic wells and water quality. Washoe County Health District does not maintain water quality information on domestic wells and only provides permits for the construction of wells. Mr. Anderson stated that there are tools and resources available to homeowners that want to have water quality testing done on their domestic wells. The University of Nevada Cooperation Extension has various fact sheets and publications on domestic wells available, as well as a link to a Water Test Interpreter program. The Washoe County Community Services Department also has some documents available on their website. The Nevada Division of Environmental Protection ("NDEP") Bureau of Safe Drinking Water has links on how to test your water, and links to the Environmental Protection Agency ("EPA"). Mr. Anderson stated that the Health District is currently revamping its website and is considering including some of these links in the next couple of months.

Commissioner Erwin asked if there are any instances when the Health District will not allow a domestic well to be drilled. Mr. Anderson stated those instances mostly have to do with setbacks and location, not water quality.

Commissioner Erwin asked about the steps a landowner takes with the Health District to get permission to drill a domestic well. Mr. Anderson stated that a permit is issued after a homeowner pays the Health District fee and requirements regarding the plot plan are met. If they have a licensed well driller, the Health District will go out and inspect the initial location of the well, confirm setbacks, do a lot check, and then perform an inspection of the drilling.

Commissioner Erwin asked what is required once the well is drilled. Mr. Anderson stated that a well log and a letter from the well driller is required. Once those are received, the Health District will sign off on the permit.

Commissioner Erwin asked if the Health District inspects how a well is hooked up to a house. Mr. Anderson replied no.

Commissioner DeMartini asked if commercial testing is required on a well with multiple tenants on a residential property. Mr. Anderson stated that he has not come across that situation but will look into it.

**6. Review of projects funded by the Regional Water Management Fund (“RWMF”) that may not spend their entire fiscal year 2014-2015 budget allocations; discussion and possible recommendations for reallocation of fiscal year 2014-2015 funds, and budget allocations for fiscal year 2015-2016 to ensure those projects are adequately funded; and, possible direction to staff – Jim Smitherman, NNWPC Water Resources Program Manager. (For Possible Action)**

Mr. Smitherman reviewed information included in the staff report regarding funded projects that may not spend their entire budget allocations for the current fiscal year. Mr. Smitherman recommended reallocating up to \$125,000 out of the Highland Canal Project. Mr. Smitherman stated that he has been advised by Reno staff that about \$40,000 is all that is expected to be used this year on the technical support for the TMDL and water quality standards work. That would free \$35,000 out of that budget allocation. With those two items together, there is potentially \$160,000 that could be reallocated before the end of the fiscal year on June 30, 2015.

Mr. Smitherman also reviewed recommendations for possible budget reallocations that included: \$25,000 to fund efforts to develop an effluent management strategy; \$22,000 to fund pre-planning activities for the development of a Truckee River Corridor Management Plan; and \$71,000 for Washoe County overhead charges.

There was a clarifying discussion regarding future overhead expenses. Mr. Smitherman also clarified that there will still be an ending fund balance, even with the shortage in the overhead budget.

COMMISSIONER PRICE MADE A MOTION TO ACCEPT THE REPORT AND DIRECT STAFF TO INCLUDE \$125,000 IN THE DRAFT FY 2015-16 BUDGET FOR THE HIGHLAND CANAL PROJECT, AND SET ASIDE \$71,000 TO COVER WASHOE COUNTY OVERHEAD FOR FY 2014-15, SECONDED BY COMMISSIONER HAZELWOOD. THE MOTION CARRIED UNANIMOUSLY WITH TEN (10) MEMBERS PRESENT.

**7. Presentation on the proposed development of a Truckee River Corridor Management Plan, and request for funding, in an amount not to exceed \$22,000 from the RWMF, to partially fund pre-project planning activities and provide match funding for a Truckee River Fund grant application; discussion and possible**

**direction to staff – Christi Cakiroglu, Keep Truckee Meadows Beautiful (“KTMB”).  
(For Possible Action)**

Terri Svetich, Stantec Senior Engineer, reviewed information on the following topics: the Truckee River; public agencies overseeing various elements and activities on the Truckee River; Truckee Meadows Water Authority (“TMWA”) concerns regarding the Truckee River; past and present flood projects; river restoration; and Truckee River TMDLs.

Christi Cakiroglu gave a presentation on the proposed development of a Truckee River Corridor Management Plan, and requested funding for pre-project planning activities. The presentation included information on the cost to the community from non-point source pollution, and the scope for the proposed Truckee River Corridor Management Plan.

Commissioner Enloe stated that the proposal being requested is only on projects and programs related to removing garbage, litter and waste from the River. The intent is to do pre-planning work to try to establish a long-term program that would maintain that effort.

Ms. Cakiroglu clarified that the proposal to the Truckee River Fund will be for addressing short-term and long-term needs for Phase 1, and that will lay the foundation for moving to Phase 2.

Commissioner Flansberg asked if the proposal would reestablish a program like the past Washoe County Sheriff crews that would do some of the cleanup along the River. Ms. Cakiroglu stated that funding for that program ended as of December 31, 2014. Prior to the recession, the City of Reno also had a Park River Ranger through the Parks Department and a River Ranger through the Reno Police Department. Since those positions were removed there has been an increase in degradation along the River. Because of cuts to the Parks Department, some of the trash cans in parks along the River have been removed because there is not sufficient staff to empty them. Ms. Cakiroglu stated that the focus of the River Plan will be looking at short and long-term needs, and a River Ranger would be on the table for discussion.

Commissioner Price asked what would happen if the NNWPC contributes to funding this effort and the grant is not awarded. Ms. Cakiroglu stated that a refund would be provided.

COMMISSIONER PRICE MADE A MOTION TO DIRECT STAFF TO WORK WITH KTMB TO DEVELOP A FUNDING AGREEMENT/CONTRACT IN AN AMOUNT NOT TO EXCEED \$22,000 FROM THE RWMF FOR THAT PURPOSE, AND AUTHORIZE THE WATER RESOURCES PROGRAM MANAGER TO SIGN THE CONTRACT, SECONDED BY COMMISSIONER ERWIN. THE MOTION CARRIED UNANIMOUSLY WITH TEN (10) MEMBERS PRESENT.

**8. Report on the development of an effluent management strategy, and request for funding, in an amount not to exceed \$25,000 from the RWMF, to contract for project manager services to lead and manage the ongoing strategy development; discussion and possible direction to staff – Jim Smitherman. (For Possible Action)**

Mr. Smitherman stated that the final technical memo on the Truckee Meadows Water Reclamation Facility (“TMWRF”)/Huffaker Reservoir Effluent Interconnection Pipeline Evaluation project is included with the staff report. Also included with the staff report is a document outlining a proposal to develop a Regional Effluent Management Strategy.

Commissioner Enloe reviewed information on the draft effluent management planning framework and the request for funding. The purpose of this effort would be to provide TMWRF’s representatives with the information they need to make an informed decision when they consider supplying effluent to areas outside of the Truckee Meadows Service Area.

Commissioner Price asked about other funding sources. Commissioner Enloe stated that there is \$100,000 in cash and/or staff time from Reno, Sparks, Washoe County, and TMWA to facilitate this effort.

COMMISSIONER SOLARO MADE A MOTION TO APPROVE FUNDING IN THE AMOUNT OF \$25,000 TO CONTRACT WITH A PROJECT MANAGER TO LEAD AND MANAGE THIS PROCESS, SECONDED BY COMMISSIONER BALL. THE MOTION CARRIED UNANIMOUSLY WITH TEN (10) MEMBERS PRESENT.

**9. Presentation of staff review comments on the “Water Purveyors” chapter for the 2016 Regional Water Management Plan (“RWMP”) update; discussion and possible direction to staff – Chris Wessel, Water Management Planner. (For Possible Action)**

Mr. Wessel reviewed information included in the staff report regarding the sections within Chapter 3 identified for updating.

Commissioner Price asked why the consolidation analysis section is included. Mr. Wessel stated that section will either be removed or will be included as a summary of consolidation events, mostly to preserve how we got to where we are.

COMMISSIONER PRICE MADE A MOTION TO ACCEPT THE REPORT, SECONDED BY COMMISSIONER SOLARO. THE MOTION CARRIED UNANIMOUSLY WITH TEN (10) MEMBERS PRESENT.

**10. Presentation of comments received on the “Conservation” chapter for the 2016 RWMP update; discussion and possible direction to staff – Jim Smitherman. (For Possible Action)**

Mr. Wessel reviewed information included in the staff report regarding updates for this chapter that will be provided by the Nevada Water Planning Division, the Nevada Public Utilities Commission, the Sun Valley General Improvement District, and TMWA. Commissioners can contact Western Regional Water Commission (“WRWC”) staff with any further comments or revisions to Chapter 7 or Chapter 3.

Commissioner Erwin stated that the TMWA Board of Directors will be seeking input from Reno, Sparks, and Washoe County planning departments as they develop the conservation measures.

COMMISSIONER ERWIN MADE A MOTION TO ACCEPT THE STAFF REPORT, SECONDED BY COMMISSIONER ENLOE. THE MOTION CARRIED UNANIMOUSLY WITH TEN (10) MEMBERS PRESENT.

**11. Presentation of comments received and proposed revisions to the “Planning Policies and Criteria” chapter for the 2016 RWMP update; discussion and possible direction to staff – Jim Smitherman. (For Possible Action)**

Mr. Smitherman summarized staff recommendations for revisions to Goals 1 through 4 in this chapter, based on comments received to date. More comments and revisions will be brought forward in future NNWPC meetings.

COMMISSIONER FLANSBERG MADE A MOTION TO ACCEPT THE STAFF REPORT, SECONDED BY CHAIRMAN DRINKWATER. THE MOTION CARRIED UNANIMOUSLY WITH TEN (10) MEMBERS PRESENT.

**12. Discussion and possible direction to staff regarding any chapters of the RWMP previously reviewed by the NNWPC in relation to the 2016 RWMP update. (For Possible Action)**

There were no comments on this item.

**13. Report on legislative activities, including Bill Draft Requests (“BDR”) and Bills pending in the 2014 session of the Nevada Legislature that may affect or are of interest to the Western Regional Water Commission / NNWPC – John Rhodes, NNWPC Legal Counsel.**

John Rhodes, NNWPC Legal Counsel, reviewed information included in the staff report regarding BDRs and Bills that may be of interest to the WRWC and the NNWPC. The WRWC staff and the WRWC Legislative Subcommittee will track Bills, recommend positions to be taken, and provide periodic updates to the WRWC and the NNWPC.

Commissioner Price asked what can be done to help get the Cloud Seeding Bill passed. Mr. Smitherman stated that the Bill is coming out of the Assembly Natural Resource Committee and that testimony at those Committee meetings may help. Mr. Rhodes stated that WRWC staff does have direction from the WRWC to support the Cloud Seeding BDR, and will do so.

**14. Program Manager’s Report – Jim Smitherman.**

- a. Report on the status of projects and work plan supported by the Regional Water Management Fund (“RWMF”);
- b. Financial report on the RWMF;
- c. Report on the Truckee Meadows Regional Planning Agency (“TMRPA”)’s parcel-based population and employment modeling project;

Mr. Smitherman stated that all projects are up-to-date, the RWMF is under-budget, and there is nothing new to report on the TMRPA project.

**15. Discussion regarding possible agenda items for the March 4, 2015, NNWPC meeting, and other future meetings; and possible direction to staff – Jim Smitherman. (For Possible Action)**

Mr. Smitherman stated future agenda items will include: review of several chapters of the RWMP, project priorities and expenditures, legislative activities report, and standing items.

Commissioner Erwin asked about the schedule for the election of a NNWPC Chairman and Vice-Chairman, and suggested addressing that item at the end of the March meeting.

Chairman Drinkwater referenced the Highland Canal Project and stated that if this body intends to fund construction projects, he would like to see some way to "risk rank" the projects. Mr. Smitherman stated that topic may be appropriate to include in the agenda item for project priorities for next year.

**16. Commission Comments**

None

**17. Staff Comments**

Commissioner Enloe was welcomed as a new member of the NNWPC.

**18. Public Comment**

None

**19. Adjournment (For Possible Action)**

The meeting was adjourned at 2:55 p.m.

Respectfully submitted by Christine Birmingham.

Approved by:

---

Michael Drinkwater, Chairman

**APPROVED BY COMMISSION IN SESSION ON \_\_\_\_\_, 2015.**

DRAFT

# Northern Nevada Water Planning Commission

## STAFF REPORT

**DATE:** February 26, 2015  
**TO:** Chairman and Members, Northern Nevada Water Planning Commission (“NNWPC”)  
**FROM:** Jim Smitherman, NNWPC Water Resources Program Manager  
**SUBJECT:** Review of projects funded by the Regional Water Management Fund (“RWMF”) and Western Regional Water Commission (“WRWC”) budget priorities for fiscal year 2015 - 2016; discussion and possible direction to staff

---

### **SUMMARY**

Staff has reviewed the list of projects funded by the RWMF relative to the fiscal year (“FY”) 2014-2015 WRWC budget, including recent professional services budget amendments. As part of the annual budget development process, staff compiles an “estimate to complete” for professional services projects that reflects the budget amendments and shows expected project expenditures through the end of the FY. This estimate, shown in the table on the following page to the right of the FY 2014-2015 professional services budget, serves as reference for discussion of FY 2015-2016 professional services priorities. The far right column shows staff’s best possible budget estimates for anticipated ongoing projects. The professional services budget detail for FY 2014-2015, extracted from the adopted budget, is also attached for reference.

Staff intends this agenda item to allow for discussion of FY 2015-2016 project priorities among the NNWPC members, including the subject of funding construction projects which directly facilitate the implementation of the Comprehensive Regional Water Management Plan, and possible direction to staff. Staff is requesting specific direct input from the NNWPC during open meeting. Individual Commissioners may also provide comments to staff as to project funding priorities at any time after the meeting, but may not discuss those comments with or provide those comments to other Commissioners outside of open meeting. Staff proposes to compile all input received and develop a draft WRWC budget for presentation at the April NNWPC meeting.

### **RECOMMENDATION**

Staff recommends that the NNWPC discuss priorities for professional services projects for inclusion in a draft WRWC budget for FY 2015-2016, and provide direction to staff during the meeting and/or input after the meeting, as specified above, no later than March 13, 2015.

JS:jd

Attachment: Professional Services Budget Detail Fiscal Year 2014/2015

<b>Professional Services Budget Worksheet</b>			
Title	FY14-15 Budget (\$x1000)	FY14-15 Est. to Complete (\$x1000)	FY15-16 Anticipated Ongoing (\$x1000)
208 Plan Review and Update	20	0	20*
Certified Landscape Technician	13	13	0
Cloud Seeding	132	132	125
Consolidation of Public Purveyors	300	300	0
Effluent Intertie TMWRF-Huffaker	0	20	0
Effluent Management Planning	0	25	100
Highland Canal	250	125	125
NPDES Storm Water Program	263	263	263
Nutrient Water Quality Standards Review Plan Update	75	40	75
Plan Update	53	0	50
Plan Update-Cost and Financing	0	24	0
Plan Update-Water Balance	0	25	0
Regional Data Dev't (Pop-Employment Model)	320	10	310
Septic System (Phase 2 Risk Assessment)	75	75	0
Truckee River Corridor Master Plan	0	22	0
Washoe Evapotranspiration Project	45	45	10
Water Rights Purchase TROA	514	610	0
Water Usage Review	66	66	66
Watershed Restoration Investment Prioritization	58	29	29
<b>TOTALS</b>	<b>2,184</b>	<b>1,824</b>	<b>1,153</b>

\*Anticipate \$40K grant from State for 208 Plan

**Professional Services Budget Detail Fiscal Year 2014/2015**

<b>Professional Services Project Name</b>	<b>2014/2015 1st Quarter Budget</b>	<b>2014/2015 2nd Quarter Budget</b>	<b>2014/2015 3rd Quarter Budget</b>	<b>2014/2015 4th Quarter Budget</b>	<b>2014/2015 Budget Total</b>	<b>Expense Description/Example</b>
<b>-b-</b>	<b>-f-</b>	<b>-g-</b>	<b>-h-</b>	<b>-i-</b>	<b>-j-</b>	<b>-k-</b>
Restoration Investments in the Truckee Watershed	\$14,525	\$14,525	\$14,525	\$14,525	\$58,100	
<i>Consolidation of Public Purveyors</i>	\$75,000	\$75,000	\$75,000	\$75,000	\$300,000	Support for TMWA and WC
<i>Highland Canal Water Quality Project</i>	\$62,500	\$62,500	\$62,500	\$62,500	\$250,000	
<i>TROA 6700 AF Water Rights Requirement</i>	\$128,500	\$128,500	\$128,500	\$128,500	\$514,000	Water rights acquisition for TROA 6700 AF requirement
<i>208 Plan Review and Update</i>	\$5,000	\$5,000	\$5,000	\$5,000	\$20,000	
<b>Regional Water Planning Projects</b>	<b>\$285,525</b>	<b>\$285,525</b>	<b>\$285,525</b>	<b>\$285,525</b>	<b>\$1,142,100</b>	
<i>Cloud Seeding</i>	\$33,000	\$33,000	\$33,000	\$33,000	\$132,000	ILA with DRI; 32K for precipitation monitoring equipment/installation
<i>Washoe ET Project</i>	\$11,250	\$11,250	\$11,250	\$11,250	\$45,000	ILA with DRI; 5K annual monitoring; 40K for weather station upgrades
<i>Water Usage Review Program</i>	\$16,400	\$16,400	\$16,400	\$16,400	\$65,600	
<i>Certified Landscape Technician Program</i>	\$0	\$0	\$0	\$12,500	\$12,500	ILA with NLA
<b>Regional Water Conservation</b>	<b>\$60,650</b>	<b>\$60,650</b>	<b>\$60,650</b>	<b>\$73,150</b>	<b>\$255,100</b>	
<i>Integrated Wastewater and Reclaimed Water System Planning</i>	\$0	\$0	\$0	\$0	\$0	Indirect Potable Reuse
<b>Regional Reclaim Water Planning Projects</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>	
<i>NPDES Storm Water Quality Management Program</i>	\$65,625	\$65,625	\$65,625	\$65,625	\$262,500	ILA with City of Reno
<b>Regional Storm Water Planning Projects</b>	<b>\$65,625</b>	<b>\$65,625</b>	<b>\$65,625</b>	<b>\$65,625</b>	<b>\$262,500</b>	
<b>Regional Flood Control Planning Projects</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>	
<i>Water Quality Standards and TMDL Review, and Compliance</i>	18,750	18,750	18,750	18,750	75,000	ILA with City of Reno for LTI
<i>Septic System Mitigation Planning</i>	\$18,750	\$18,750	\$18,750	\$18,750	\$75,000	1. Phase II - Risk assessment data needs (150k for two years)
<b>Regional Wastewater Planning Projects</b>	<b>\$37,500</b>	<b>\$37,500</b>	<b>\$37,500</b>	<b>\$37,500</b>	<b>\$150,000</b>	
<i>Water Management Plan Update</i>	\$13,250	\$13,250	\$13,250	\$13,250	\$53,000	
<i>TMRPA GIS Population Model</i>	\$80,000	\$80,000	\$80,000	\$80,000	\$320,000	ILA with RPGB
<b>Comprehensive Plan</b>	<b>\$93,250</b>	<b>\$93,250</b>	<b>\$93,250</b>	<b>\$93,250</b>	<b>\$373,000</b>	
<b>Totals</b>	<b>\$542,550</b>	<b>\$542,550</b>	<b>\$542,550</b>	<b>\$555,050</b>	<b>\$2,182,700</b>	

# Northern Nevada Water Planning Commission

## STAFF REPORT

**DATE:** February 26, 2015  
**TO:** Chairman and Members, Northern Nevada Water Planning Commission (“NNWPC”)  
**FROM:** Jim Smitherman, NNWPC Water Resources Program Manager  
**SUBJECT:** Presentation of staff comments on the “Flood Management and Storm Water Drainage” chapter for the 2016 Regional Water Management Plan (“RWMP”) update; discussion and possible direction to staff

---

### SUMMARY

Staff has reviewed Chapter 5 (Flood Management and Storm Water Drainage) of the 2011 RWMP, and determined that many sections, including Sections 5.1 through 5.5 as listed below, are current and will be adequate for incorporation into the 2016 plan with only minor updates as needed. Other sections will require revisions, such as Section 5.6 on the Truckee River Flood Project. The attached copy of Chapter 5 of the 2011 RWMP shows redline edits received from the Truckee River Flood Management Authority. In addition, Sections 5.7 and 5.8 have been shaded by staff to show text presently under review by Reno, Sparks and Washoe County staff.

The following is a brief overview of sections within Chapter 5 that staff has reviewed:

- 5.1 ***Flood Damage:*** Minor updates as needed, if any.
- 5.2 ***Flood History and Regional Setting:*** Minor updates as needed, if any.
- 5.3 ***Federal Legislation and Programs to Address Flood Issues:*** Minor updates as needed, if any.
- 5.4 ***State Legislation:*** Minor updates as needed, if any.
- 5.5 ***History of Truckee River Flood Control Efforts:*** Minor updates as needed, if any.
- 5.6 ***Truckee River Flood Project:*** Redline edits provided by the Truckee River Flood Management Authority.
- 5.7 ***Local Storm Water Drainage Programs:*** Sections 5.7.1 through 5.7.4 have been provided to Reno, Sparks and Washoe County for review and comment.
- 5.8 ***Flood Control and Drainage Overview by Hydrographic Basin:*** Sections 5.8.1 through 5.8.12 have been provided to Reno, Sparks and Washoe County for review and comment.

### RECOMMENDATION

Staff recommends that the NNWPC accept the review notes on Chapter 5 of the 2011 RWMP, with or without changes, and provide direction to staff as appropriate concerning this chapter as part of the development of the 2016 RWMP update.

JS:CW:jd

Attachment: 2011 RWMP Chapter 5 with review annotations and recommended revisions

## Table of Contents

<b>Chapter 5 – Flood Management and Storm Water Drainage</b> .....	5-3
<b>5.1 Flood Damage</b> .....	5-5
5.1.1 <b>Consequences of Flooding</b> .....	5-6
<b>5.2 Flood History and Regional Setting</b> .....	5-8
5.2.1 <b>History of Flooding in the Planning Area</b> .....	5-8
5.2.2 <b>The Flood of January 1, 1997</b> .....	5-9
5.2.3 <b>Alluvial Fan Flooding in the Planning Area</b> .....	5-9
5.2.4 <b>Flooding from December 31, 2005 through March 2006</b> .....	5-11
<b>5.3 Federal Legislation and Programs to Address Flood Issues</b> .....	5-12
5.3.1 <b>National Flood Insurance Act / Flood Disaster Protection Act</b> .....	5-12
5.3.2 <b>National Flood Insurance Program</b> .....	5-12
5.3.3 <b>Federal Emergency Management Agency</b> .....	5-13
5.3.4 <b>US Army Corps of Engineers</b> .....	5-14
5.3.5 <b>Natural Resources Conservation Service</b> .....	5-15
<b>5.4 State Legislation</b> .....	5-15
<b>5.5 History of Truckee River Flood Control Efforts</b> .....	5-15
<b>5.6 Truckee River Flood Project</b> .....	5-16
5.6.1 <b>Goals</b> .....	5-17
5.6.2 <b>Partners</b> .....	5-17
5.6.3 <b>Cost and Funding</b> .....	5-17
5.6.4 <b>Project Timing</b> .....	5-18
5.6.5 <b>Plan Alternatives</b> .....	5-21
5.6.6 <b>Structural Elements</b> .....	5-22
5.6.7 <b>Non-Structural Elements</b> .....	5-29
5.6.8 <b>Other Measures</b> .....	5-29
<b>5.7 Local Storm Water Drainage Programs</b> .....	5-36
5.7.1 <b>Drainage Facilities</b> .....	5-37
5.7.2 <b>Flood Plain Management</b> .....	5-39
5.7.3 <b>Truckee Meadows Regional Drainage Manual</b> .....	5-40
5.7.4 <b>Draft Washoe County Regional Flood Control Master Plan</b> .....	5-40
5.7.5 <b>Flood Plain Storage Outside the Truckee River Watershed</b> .....	5-40
<b>5.8 Flood Control and Drainage Overview by Hydrographic Basin</b> .....	5-41
5.8.1 <b>Spanish Springs Valley Hydrographic Basin</b> .....	5-41
5.8.2 <b>Truckee Canyon Hydrographic Basin (Verdi)</b> .....	5-42
5.8.3 <b>Lemmon Valley Hydrographic Basins</b> .....	5-42
5.8.4 <b>Pleasant Valley Basin</b> .....	5-43
5.8.5 <b>Warm Springs Valley Hydrographic Basin</b> .....	5-43
5.8.6 <b>Sun Valley Hydrographic Basin</b> .....	5-43
5.8.7 <b>Washoe Valley Hydrographic Basin</b> .....	5-43

<u>5.8.8</u>	<u>Antelope Valley Hydrographic Basin</u> .....	5-43
<u>5.8.9</u>	<u>Bedell Flat Hydrographic Basin</u> .....	5-43
<u>5.8.10</u>	<u>Dry Valley Hydrographic Basin</u> .....	5-44
<u>5.8.11</u>	<u>Red Rock Valley Hydrographic Basin</u> .....	5-44
<u>5.8.12</u>	<u>Cold Springs Valley Hydrographic Basin</u> .....	5-44

### **List of Tables**

<u>Table 5-1</u>	<u>Estimated Peak Flows - Truckee River at Reno</u> .....	5-4
<u>Table 5-2</u>	<u>Drainage Code References for Reno, Sparks and Washoe County</u> .....	5-38

### **List of Figures**

<u>Figure 5-1</u>	<u>1997 Flood Area Inundated Relative to the FEMA 100-Year Flood Zone in 1997</u> . 5-10	
<u>Figure 5-2</u>	<u>Flood Project Locations: Truckee Meadows (A)</u> .....	5-24
<u>Figure 5-3</u>	<u>Flood Project Locations: Truckee Meadows (B)</u> .....	5-25
<u>Figure 5-4</u>	<u>Flood Project Locations: Lower Truckee River (A)</u> .....	5-28
<u>Figure 5-5</u>	<u>Flood Project Locations: Lower Truckee River (B)</u> .....	5-28
<u>Figure 5-6</u>	<u>Critical Flood Zone Areas</u> .....	5-34

## **Chapter 5 – Flood Management and Storm Water Drainage**

### ***Purpose and Scope***

This chapter describes the various entities that provide flood management or storm water drainage services within the Planning Area including the Truckee River Flood Project (“Flood Project”), its governing body and plans, City of Reno (“Reno”), the City of Sparks (“Sparks”), and Washoe County. Subjects covered include flooding history, types of floods, federal programs, federal state and local laws, progress on the Flood Project, structural and nonstructural alternatives for flood control, local drainage programs, flood control and drainage facility design standards, regional facilities and facilities for single drainage basins.

### ***Summary and Findings***

The property at risk from a 100-year flood in the Truckee Meadows was valued by Washoe County in 2004 at approximately \$5 billion using a geographic information system (“GIS”) compilation of the 1997 flood boundary and the assessed value for parcels within the boundary. A 2007 analysis by the Nevada Bureau of Mines and Geology (“NBMG”) using a Federal Emergency Management Agency (“FEMA”) loss estimation model to estimate 100-year flood risk in Washoe County estimated building exposure, a measure of the economic wealth of the county, at \$25 billion and building-related economic losses at \$980 million (NBMG, 2007).

Physical damages and economic impacts resulting from the 1997 Truckee River flood (the largest flood of record) totaled about \$700 million<sup>1</sup> in Washoe County and \$1 billion in the six county area hit by the flood in northern Nevada.

Nevada ranks #1 in flood loss payments from the National Flood Insurance Program (“NFIP”) for western, non-coastal states for the last 30 years (January 1, 1978 through November 30, 2009 including Arizona, Colorado, Idaho, Montana, Nevada, New Mexico, Utah, and Wyoming).

Over the last 30 years, Sparks, Reno, and Washoe County rank #1, #2, and #3, respectively, for the total amount of flood insurance payments in Nevada from the NFIP. Together, the three areas account for 74 percent of the total flood loss payments in Nevada or almost three times more than all other areas in Nevada combined for the last 30 years (\$27,651,343 vs. the statewide total of \$37,370,575).

Riverine flooding and alluvial fan flooding are both common in northern Nevada. Riverine flooding occurs when flows in rivers and streams rise over a period of hours or days and overtop stream banks inundating nearby flood plains and low-lying areas. Alluvial fan flooding occurs when floodwaters emerge from canyons flowing out of the upper mountains onto an alluvial fan, typically with little or no warning, and travel downstream at very high velocities carrying significant loads of sediment and debris.

Incorporation of hydrologic data since the mid-1980s has resulted in estimated peak flow for specific frequency events higher than originally thought. The 100-year flood event (or one-

---

<sup>1</sup> In 1997 dollars. The Army Corps of Engineers (“ACOE”) estimated physical National Economic Development (“NED”) Plan damage at approximately \$500M. The Truckee River Water Management Council did an economic impact study that concluded total damage to be \$780M.

percent risk flood) at Reno is now estimated to be 20,700 cubic feet per second (“cfs”). Peak flows for certain frequency events are shown in Table 5-1.

These flows can change direction and realign the existing channel through the alluvial fan as the energy of the water erodes small channels, water is diverted over un-channeled ground, and new channels are established.

**Table 5-1 Estimated Peak Flows - Truckee River at Reno**

<b>Exceedance (i.e., chance of occurrence in any single year)</b>	<b>Peak Flow (cfs)</b>
1/20	9,200
1/50	14,800
1/100*	20,700
1/500	63,000

Source: ACOE

\* Flooding that has a one-percent chance of being equaled or exceeded in any given year, also referred to as a 1 in 100 year flood event or a 100-year flood. Note: The USGS, using a different analysis technique to account for upstream reservoirs estimates the 1/100 peak flow to be approximately 26,000 cfs.

In the 1985 feasibility report for the Truckee River Flood Project, the estimated discharge for the 100-year event at Reno was computed at approximately 18,500 cfs. This flow has been used by FEMA to identify areas subject to flooding for flood insurance purposes.

The peak water surface elevation for the January 1997 flood, considered to be slightly greater than the 100-year flood event, was approximately 1.6 feet higher than the existing FEMA base flood elevation at the Vista gage. Therefore the actual 100-year flood levels are higher than those shown on FEMA flood maps especially in the area east of U.S. Highway 395, with the greatest difference occurring east of McCarran Boulevard. Structures built to current FEMA standards within the area approximately bounded by Rock Boulevard, Interstate 80, and Mira Loma Boulevard are not necessarily protected during a 100-year flood event despite the depictions on the FEMA flood maps.

Information prepared for the Regional Water Planning Commission (“RWPC”) through a study by WRC Nevada in 2003 indicates that loss of flood storage volumes due to development of existing approved land uses within the flood plain on the north and south sides of the Truckee River could result in an increase of 0.4 to 0.6 feet in the base flood elevation. Since this study looked only at development that might occur outside of the floodway and in areas zoned for development at that time, placing fill in the flood plain would result in even higher flood levels than predicted if there were changes in zoning and acceptable land uses.

As land uses change in the Truckee River watershed, both runoff volumes and velocity of flows typically increase. This is reflected in changes in the shape and size of the hydrographs of flows entering the Truckee River at places such as the North Truckee Drain, Boynton Slough, Dry Creek, Evans Creek, and Steamboat Creek. Without mitigation, these changes could affect the functioning of the Flood Project by causing higher peak flood elevations, thus reducing the effectiveness of the project and reducing the level of protection.

In 1997, approximately 120 to 150 homes were inundated above the first floors. Information prepared by participants in the Flood Project Working Group indicates that an increase in the base flood elevation of as little as two or three inches over the 1997 flood event could result in the inundation of approximately 1,800 additional homes in the Steamboat Creek area under the same flooding conditions. Other properties throughout the region would likely be subject to additional damages (Flood Project staff, personal communication).

FEMA maps were adopted for the region in 1984. Local ordinances were adopted shortly thereafter requiring the first floor of structures to be elevated either one or two feet above the FEMA base flood elevation. Structures constructed after 1984 were generally built in compliance with these ordinances and are at less risk of flooding, while structures constructed prior to 1984 are at higher risk. However, many of the current FEMA flood maps are off by 0.5 to 1 foot as demonstrated in the 1997 flood, during which some homes experienced flooding unexpectedly.

### ***Introduction***

Two key points must be recognized when planning for the management of flood events:

1. Flooding is a regional phenomenon; floodwater does not respect municipal or property boundaries.
2. Every area has a flood and storm water drainage conveyance system, whether planned or not.

### **Definition of Terms**

In general, *storm water drainage* refers to the conveyance of flows during storm events that do not result in streams and rivers overflowing their banks or cause the design capacity of storm drain facilities to be exceeded. In contrast, *flooding* occurs when streams or rivers overflow their banks or flows exceed storm drain capacities causing floodwater to inundate nearby lands.

Much of this chapter is focused on the Truckee River Flood Project. Flood management services in drainages not tributary to the Truckee River are shared by the local jurisdictions' departments of public works and community development, in conjunction with storm water drainage activities. Local government storm water drainage and flood management activities outside the Truckee River watershed are covered in Section 5.7 Local Storm Water Drainage Programs and Section 5.8 Flood Control and Drainage Overview by Hydrographic Basin.

## ***5.1 Flood Damage***

Major flooding in an urban environment has many adverse consequences, including monetary damages and loss of real property. Monetary loss is the primary method of depicting flood damages and assessing the effectiveness of flood protection alternatives. Floods also have non-monetary effects, such as impacts on public health and safety, damages from toxic and hazardous waste contamination, and loss of environmental resources in the flood plain. Monetary loss can come from physical damage and also reduced economic activity due to disruption in the local economy during and after a flood event.

### ***5.1.1 Consequences of Flooding***

Following are brief descriptions of potential monetary and non-monetary consequences of flooding in the Truckee Meadows area.

#### **Public Health and Safety**

The State Demographer estimates that more than 416,000 people live in the Planning Area. The effect of flood structure failure and resultant flooding on human life depends on the magnitude of a flood, population at risk, flood warning time and evacuation routes. In addition to loss of life, major flooding could result in life-threatening injury and the spread of communicable diseases. Evacuating the flood plain in anticipation of a major flood could have its own consequences, including traffic accidents and other injuries associated with the rapid displacement of thousands of people. There was one fatality during the 1997 flood. In addition, there is the potential for loss of life and property damage associated with flooding on alluvial fans, which is not accounted for in the damage statistics listed for Truckee River flooding.

#### **Contamination from Toxic, Hazardous, and Related Waste**

Flooding may result in significant releases of toxic and hazardous substances from above-ground tanks and drums containing heating oil, fuel oil, liquid propane, and kerosene; agricultural chemicals such as herbicides, pesticides, solvents, and fertilizers; many commercial and industrial chemicals; and untreated wastewater. Widespread flooding could also result in groundwater contamination.

#### **Flood Cleanup and Resources Consumption**

Major flooding generates large quantities of flood-related debris, most of which is hauled to local landfills. Rebuilding or relocating homes, businesses, and related infrastructure requires additional natural and financial resources.

#### **Property and Businesses**

Damageable property in the Truckee Meadows flood plain consisting of commercial, industrial, residential, and public buildings was valued at approximately \$5 billion in 2004 using a GIS compilation of the 1997 flood boundary and the assessed value for parcels within the boundary. In a 2007 analysis, the NBMG used the FEMA loss estimation model, HAZUS MR2, to estimate 100-year flood risk in Washoe County. Building exposure, a measure of the economic wealth of the county, was estimated at \$25 billion and building-related economic losses were estimated at \$980 million (NBMG, 2007). In addition to property and building losses, the effects on the day-to-day business of the Reno-Sparks metropolitan area are significant. During a large flood, many businesses are forced to close, at least temporarily, both during flooding and cleanup afterward, resulting in lost revenues and wages. Additional economic impacts may affect other businesses, even if they do not flood, such as those that rely on materials or products coming from flooded businesses. People not living in flooded areas can suffer lost wages if their businesses flood or are impacted because other businesses flood.

Physical damages caused by inundation losses or flood response preparation costs are the main types of flood damages within the flood plain. Physical damages include damage to, or loss of, buildings and their contents, raw materials, goods in process, and finished products awaiting distribution. Other physical damages include damage to infrastructure such as roads,

utilities, bridges, water and wastewater treatment facilities, and flood structures and floodwalls, as well as cleanup costs. Additional costs are incurred during flood emergencies for evacuation and re-occupation, flood fighting, and disaster relief. Loss of life or impairment of health and living conditions are intangible damages that cannot be evaluated in monetary terms.

Average annual equivalent damages are the expected value of damages for a given economic condition and point in time. They are determined by weighing the estimated damages from varying degrees of flooding by their probability of occurrence. Average annual equivalent flood damages were estimated by the Army Corps of Engineers (“ACOE”) at \$32 million for existing development conditions in 2004.

### **Types of Floods**

Flood hazards in Nevada are typically underestimated because of the state’s arid climate, highly variable precipitation patterns due to the mountain ranges and the valleys between them, the existence of few perennial streams, and the lowest precipitation in the country. Lack of data and a sparse stream-gauging network also contribute to underestimation of flood hazards. Different types of flood hazards in the Planning Area require different kinds of management strategies. Truckee River flooding has been of primary concern to the Reno/Sparks metropolitan area for decades, emphasized by the 1997 flood event, however flooding on Truckee River tributaries, alluvial fans and playas are also concerns.

Riverine flooding and alluvial fan flooding are common in Nevada. Riverine flooding occurs when water levels in rivers and streams rise with increasing discharge volumes over a period of hours or days. Floodwaters overtop stream banks and inundate nearby low-lying areas. In northern Nevada, riverine flooding typically occurs during the winter or spring runoff periods.

Alluvial fans are common landforms in arid areas and are found throughout Nevada. An alluvial fan is a fan-shaped deposit of sediment created where a stream flows out of mountainous or hilly terrain onto the valley floor. The stream may be perennial, intermittent or ephemeral. Alluvial fans are the cumulative result of successive flood events over hundreds or thousands of years. Alluvial fan flooding occurs when floodwaters emerge from a canyon mouth and travel downstream at very high velocities carrying significant loads of sediment and debris. This type of flooding can occur with little warning and as such would be considered a form of flash flooding.

Steep slopes and high stream flow velocities in mountainous terrain allow floodwaters to erode and transport huge amounts of sediment ranging in size from fine silt and clay to house-sized boulders. As these floodwaters exit the mountains onto an alluvial fan, they spread out and slow down causing deposition of the sediment load. This deposition sometimes plugs the active stream channel at the canyon mouth causing the stream to change course and flow down the fan in a new channel. Alluvial fan flooding is potentially more dangerous than riverine flooding because it is less predictable and the threat is not apparent; therefore it is not often considered during land development. Additionally, the influence of minor grading, roads, and structures can greatly impact and exaggerate damage from this kind of flood. The hazards associated with alluvial fan flooding are compounded by the potential for migration of floodwaters across the width of the fan. Alluvial fan flooding impacts are especially severe on fans where development has occurred without the installation of adequate mitigation measures.

Alluvial fan floods are a type of flash flood; however, flash floods can occur in other kinds of drainages, generally in response to high intensity rainfall concentrated over a relatively small

area. Heavy rain collects in a stream or gully, instantly turning the normally calm drainage way into a rushing current. Flash flood waters move rapidly downstream and can have the power to move boulders, tear out trees, and destroy buildings and bridges. Mountainous terrain, thunderstorms and development on alluvial fans are all common in the Planning Area. Flash flooding on streams and washes emerging from steep canyons is another significant flood hazard in Nevada.

Playa flooding occurs when storm waters drain into a closed, dry-lake basin causing water levels to rise. Unlike other types of floods, however, water levels don't recede immediately after the rain event. Water levels can continue to rise after a rain event due to the time it takes for runoff to reach the playa through natural channels, streets, storm sewers and infiltration and transmission as groundwater to the playa. This happens over time as water leaves the playa through infiltration into the ground and/or evaporation. Lake flooding is similar to playa flooding if the lake doesn't have an outlet. Lakes with outlets also flood if the volume of water flowing in is greater than the amount leaving the lake.

## ***5.2 Flood History and Regional Setting***

The Truckee Meadows area has a long history of floods. Melting snow, cloudbursts, and heavy rains have all caused floods in the Planning Area. Rain-caused floods, normally occurring from October through March and characterized by high peak flows and short durations, have caused the major flood problems in the area. Flood records indicate that significant damaging flood events have occurred almost every decade since the 1860s. In the 1960s, flood control works consisting of reservoirs and channel modifications, have reduced the magnitude and frequency of flooding in the area. In addition to floods on the Truckee River, a small number of damaging flash floods have occurred in recent history.

Regarding the effect of upstream dams, the ACOE used Truckee River flow records since the early 1900s and, accounting for the effects of the dams, calculated an "unregulated record of flow". Analysis on the unregulated flows produced flow rates for the various flood frequencies, including the 100-year event. The effects of the upstream dams were then added to generate "regulated flow rates" for the various flood frequencies. The 100-year event is 20,700 cfs. To show the impact of the upstream dams on the flow rates through Reno, the ACOE modeled the flood of 1997 as if the dams were not in place. With no upstream dams, except the Tahoe City dam at the Lake Tahoe outlet, the peak flow rate at the Reno gage would have been nearly 50,000 cfs rather than the estimated 23,000 cfs.

The cost of recovery from flood events is rising. Prior to the January 1997 flood event in northern Nevada, damages due to flooding on the Truckee and Carson Rivers totaled more than \$31.5 million. The damage caused by flooding on the Truckee River during the January 1997 event exceeded \$700 million if indirect damages such as lost revenue, wages, and sales taxes are included.

### ***5.2.1 History of Flooding in the Planning Area***

The Truckee Meadows area experiences major flooding caused generally by two types of precipitation events: 1) warm winter storms in which rain is widespread throughout the watershed, and 2) local convective thunderstorms that generally produce isolated sub watershed flooding in the summer months. The 100-year flood event has been based on winter rain-on-snow events. Major Truckee River flood events have been recorded in 1861-1862, 1867-1868, 1907, 1950, 1955, 1963, 1986, 1997 and 2005. Two storms in 2006 (February 12

and March 20) came close to overtopping the banks of the Truckee River, and heavy rains again in 2008 caused Truckee tributaries, including Steamboat Creek to rise significantly, but did not overtop the channel banks and cause significant flood damage.

### ***5.2.2 The Flood of January 1, 1997***

Detailed accounts of the January 1997 flood on the Truckee River have been published by the Nevada Division of Water Planning (1997) and the NBMG (1998). The following description draws from these publications and from personal communication with Flood Project staff.

December 1996 was an unusually wet month in northern Nevada. An above-average snow pack had accumulated in the Truckee River drainage basin. A warming trend ensued in late December, followed by the worst possible scenario: heavy rain on a melting snow pack. The frontal storm, which led to flooding in western Nevada, began on December 31, 1996 with rainfall in the foothills west of Reno. During the next three days rain, sleet and some snow was continuous in the Reno/Sparks area, but the overall accumulated rainfall was not extensive in the urban area (1.47 inches at the Reno Airport). In the foothills to the southwest; however, National Weather Service Doppler Radar ("Nexrad") data indicated that in two areas more than five inches of rain fell on the heavy snow pack. Three to five inches of rainfall were estimated at higher elevations. The resulting discharge in the Truckee River continued to increase and the flood stage ultimately crested in Reno at 10:15 a.m. on January 2, 1997. After the flood, the ACOE estimated that a 100-year flood event would result in flood flows of 20,700 cfs. The ACOE also determined that the 23,000 cfs peak flow at the Reno gage, estimated using high water marks in downtown Reno and HEC-RAS modeling, represents a 117-year event.

Early in the flood event, Reno bridges began accumulating debris reducing their conveyance capacity. Video footage shows construction equipment (logging tractors) on one bridge attempting to clear the debris off the upstream side of the bridge piers. Removal of the debris resulted in a decrease of one foot in the surging flood stage in the downstream Reno streets.

The Truckee River has a varying channel conveyance capacity through Reno and Sparks. Overbank flooding in the Sparks area started at discharges as low as 11,000 cfs. Channel capacity in this area is only 6,000 cfs so significant flooding occurred in the Sparks industrial area. Flooding also inundated and closed the Reno -Tahoe International Airport. Figure 5-1 shows the total area inundated relative to the FEMA 100-year flood zone. Damages recognized by the ACOE that can be used to justify federal expenditures on a flood control project were calculated to be in the range of \$450 to \$500 million. Local damage estimates, however, exceeded \$680 million in a study conducted by the Truckee River Water Management Council – a group of flood impacted business mostly caused by inundation (Truckee River Water Management Council, 1997).

Historically, the greatest flood damages in the Planning Area have resulted from Truckee River flooding. There are a number of approaches that have been considered to reduce these flood damages over the past 50 years. The flood of 1997 re-energized efforts to implement measures to reduce the impact of flooding on the community.

### ***5.2.3 Alluvial Fan Flooding in the Planning Area***

Alluvial fan and flash flooding, while not as present in the community's recent memory, have been even more catastrophic than Truckee River flooding in terms of loss of life. In 1956, Galena Creek flooding resulted in four fatalities versus one fatality due to Truckee River flooding

INSERT

**Figure 5-1 1997 Flood Area Inundated Relative to the FEMA 100-Year Flood Zone**

in 1997. In some cases, development is progressing on alluvial fans without the benefit of adequate upstream protective measures. This development also changes the hydrology of the developed fan area which changes how runoff leaves the developed fan area. This could change impacts downstream depending on what has been done to stabilize channels. Stabilized downstream channels designed before development may not be in the needed location after development, especially if there are directional changes in flows that were not anticipated by the development design. In general, fan development decreases infiltration into the fan and increases runoff volume and velocities downstream.

An alluvial fan flood occurred during June of 2002 in west Spanish Springs Valley when a localized thunderstorm caused a significant amount of sediment to be eroded from Hungry Ridge and deposited in the new Eagle Canyon subdivision immediately to the east. Water and sediment also caused about \$500,000 in damage to Spanish Springs High School. Sediment deposition filled detention ponds above the subdivision, decreasing the available storage for floodwater. Water flowed over the emergency spillways of the detention basins and down a channel toward the subdivision. This outflow caused severe erosion in the channels just downstream of the detention dams. When the sediment-laden floodwater met a berm along the edge of the subdivision, sediment deposition occurred again. Some storm water and sediment spilled into the subdivision where it plugged drainage culverts, storm inlets, storm sewers and streets. Water flowed into most yards in the subdivision and caused erosion of landscaping material and the deposition of sediment, which had to be cleaned from storm sewers, drainage structures and channels, streets, and many yards in the weeks after the storm.

#### ***5.2.4 Flooding from December 31, 2005 through March 2006***

Truckee River flooding that occurred on December 31, 2005 and continued during two additional events through March 2006, was caused by heavy rainfall on the east side of the Carson Range divide, not by rain-on-snow events. This caused larger than normal flows in Truckee River tributaries. Increasing floodwater elevations were somewhat mitigated as rain changed to snow in the upper elevations. Even so, Steamboat Creek flows approached a 100-year event. Flood damages were significant in downtown Reno and in the east Sparks industrial area. Nine hundred businesses flooded, but at lesser depths than in 1997. Flood waters flowed from a small number of low spots along the north banks of the Truckee River and backed up behind the existing levee-like structures ("flood structures") east of McCarran Boulevard. Floodwater started to overflow the Truckee River banks at the Grand Sierra Resort campground, similar to the 1997 Flood.

In response, Reno installed concrete K-railing and kept flows in the river. This prevented floodwaters from reaching the airport. A month later the same precipitation situation re-occurred and the Emergency Operations Center ("EOC") was opened. Fortunately flows did not overtop the flood structures along the river; however, some flooding occurred at low areas adjacent to the banks. A month later the same precipitation scenario occurred a third time, although this time the amount was less and forecasts were for about a 10-year event flow. Less physical damage resulted from the third event, but there were three response instances, activity to control flooding during the event and clean up after the event. These costs are usually not reflected in flood insurance claims. Additionally, flood insurance claims don't include damage to uninsured property, contents of buildings, truck trailers or other storage areas within the flood plain.

### **5.3 Federal Legislation and Programs to Address Flood Issues**

#### **5.3.1 National Flood Insurance Act / Flood Disaster Protection Act**

Flood protection for the Reno/Sparks metropolitan area and surrounding Washoe County is provided by two mechanisms: (1) flood plain regulations and (2) flood control projects. Both of these mechanisms are influenced by federal regulations.

The National Flood Insurance Act of 1968 and the Flood Disaster Protection Act of 1973 offer subsidized flood insurance and flood disaster protection in return for participating communities' implementation of flood plain management regulations as set forth in the NFIP.

#### **5.3.2 National Flood Insurance Program**

The NFIP was established in 1968 with the passage of the National Flood Insurance Act. The purpose of the act is to encourage local communities to mitigate future flood damage by adopting and enforcing minimum flood plain management ordinances, thus making the community eligible for the program and allowing property owners to purchase federally subsidized flood insurance.

Nevada ranks first among western, non-coastal states (Arizona, Colorado, Idaho, Montana, Nevada, New Mexico, Utah, and Wyoming) in NFIP flood loss payments from 1978 through 2009. Over the last 30-plus years, Sparks, Reno, and Washoe County rank first, second, and third, respectively, for the total amount of NFIP flood insurance payments in Nevada. Flood loss payments to these three jurisdictions total \$27,651,343, or 74 percent of the statewide total of \$37,370,575.

The NFIP provides Flood Insurance Studies ("FIS") and Flood Insurance Rate Maps ("FIRM") prepared by FEMA for participating communities. A FIRM designates Special Flood Hazard Areas ("SFHA") within a community that is subject to a 100-year flood.

Adoption of the minimum standards for flood plain management identified in the Code of Federal Regulations ("CFR") Title 44, section 60.3, is the primary requirement for participation in the NFIP. The minimum NFIP requirements are flood plain management standards, which are generally applicable nationwide, but that do not take into account unique regional and local conditions.

Participation in the NFIP ensures the availability of federally subsidized flood insurance and flood disaster relief to property owners within the communities. As part of the program, communities are required to adopt ordinances that regulate development within the 100-year flood plain by elevating structures in the floodway fringe and preventing construction in the floodway.

Washoe County, Reno and Sparks are all participants in the NFIP. Studies in the 1970s led to the adoption of local ordinances in the early 1980s. Each jurisdiction has adopted Flood Hazard Reduction Ordinances that established guidelines and requirements for the development of property within areas determined to be subject to flood damage. The NFIP also establishes criteria for construction in Special Flood Hazard Areas.

Counties and communities that do more than the minimum required by the NFIP are eligible for participation in the Community Rating System ("CRS"), which provides credits in the form of

reduced insurance costs for property owners holding flood insurance. Washoe County is a CRS participant and, by meeting certain program requirements, has secured a 15 percent reduction in insurance premiums for un-incorporated Washoe County property owners.

Reno, Sparks and Washoe County each has its own flood plain manager and flood plain codes, however the region is mapped as one area. Separate maps and studies are not done simply because a flood plain crosses a local jurisdictional boundary. Separate tributary watersheds studies are done, but the information is reflected on the regional flood maps.

Prior to the adoption of flood hazard reduction ordinances and participation in the NFIP, development within the 100-year flood plain was not regulated to prevent flood damage. The only requirements adopted by the communities at that time were setbacks from stream banks and construction of storm drains to contain and convey away from properties storm water flows from much lower frequency events (5- to 10-year events).

Detailed scientific and engineering studies are performed by FEMA consultants or by the jurisdictions. FEMA reviews the studies to identify the flood hazard areas and limited flooding areas. These studies are used by FEMA to prepare FIRMs that are adopted and incorporated by reference into the flood hazard reduction ordinances administered by each jurisdiction.

The initial FIRMs for Washoe County were completed in 1984. Annually, the community meets with FEMA to discuss the need for new studies or restudies. When complete, the new studies or restudies are used to revise the 1984 maps. Some of the current FEMA maps have been updated as of September 1994 as a result of restudies, however others, including most of the areas along the Truckee River, have not been changed since the original mapping was done, except for a small number of maps updated in 2001.

Following Hurricane Katrina in 2005 and the significant impact of flooding in the New Orleans region, FEMA accelerated its program to update and digitize the existing FIRMS nationwide. The countywide FIRM's for Washoe County were updated on March 16, 2008, but these updates reflect few substantive revisions based on a limited amount of improved data or analysis. The 2008 update was primarily focused on the transition to digital mapping as well as updates to reflect changes in the status of levees and levee-like structures. Although the conversion to digital maps did not substantially change the data, it did highlight areas of incongruity and conflicts. FEMA has been revising the maps for these areas to more accurately portray flood risk. This process has resulted in more homes and businesses in the Truckee Meadows that are located in the 100-year flood plain than were previously identified using non-digital maps, and corresponding flood insurance premium increases.

The Public Works Departments of Reno and Sparks, and the Community Development Department of Washoe County, maintain on file the current FIRMs.

### ***5.3.3 Federal Emergency Management Agency***

#### **FEMA – Project Impact**

Project Impact is FEMA's program for developing disaster resistant communities. This program was initiated in 1998 and the City of Sparks was named as the first Project Impact Community in Nevada. Project Impact was developed to help communities take responsibility for mitigating the impact of disasters of all types.

Several federal agencies have programs that support flood plain management at the state level by providing funding and technical assistance, and facilitating coordination with local communities. FEMA provides technical assistance on flood plain management issues and oversees the NFIP. In addition, FEMA offers flood mitigation programs and technical assistance in updating the State Hazard Mitigation Plan, and funds mitigation projects through grants such as the Hazard Mitigation Grant Program and the Flood Mitigation Assistance Program.

### ***5.3.4 US Army Corps of Engineers***

The ACOE offers both emergency and long-term services for pre- and post-disaster mitigation and response. The agency performs general investigation studies for flood control, and provides flood plain management planning services, in addition to its role in design and construction of flood retention structures. The ACOE recently introduced a Flood Hazard Mitigation and Riverine Restoration program, entitled Challenge 21, intended to focus on non-structural solutions to restore river channels that were modified for flood control. Two programs in which this region has participated are briefly described below.

#### **General Investigation Program**

One of the most common ways the ACOE helps communities solve water resource problems is through individually authorized studies and projects. These studies are undertaken in response to a Congressional Resolution from the House Committee on Public Works and Transportation, the Senate Committee on the Environment and Public Works, or a Public Law. In the General Investigation program, the ACOE jointly conducts a study with a non-federal sponsor and, if shown by the study to be feasible, moves forward with the project. This approach requires that Congress provide the ACOE with authority and funds to first accomplish a feasibility study and secondly, to construct the project. Local sponsors share the study and construction costs with the ACOE, and usually pay for all operation and maintenance costs. The program may be used to address any one of a variety of water resource problems, including navigation, flood damage reduction, and ecosystem restoration. The major stages of a project are:

- Reconnaissance Phase
- Feasibility Phase
- Pre-construction Engineering & Design (“PED”)
- Construction
- Operations/Maintenance, repair replacement and rehabilitation

#### **Section 595 Rural Program**

Section 595 of the Water Resources Development Act (“WRDA”) of 1999, as amended, authorizes the ACOE to provide design and construction assistance to non-federal interests in rural Nevada, Idaho and Montana for water-related environmental infrastructure and resources protection and development projects. Design and construction assistance may be provided only for projects that are owned by public entities. Section 595 refers specifically to, among other Nevada Counties, “the portions of Washoe County, Nevada, that are located outside the Cities of Reno and Sparks”, and authorizes \$25 million for rural Nevada.

### ***5.3.5 Natural Resources Conservation Service***

The US Department of Agriculture, Natural Resources Conservation Service (“NRCS”) provides services related to measuring and reducing flood hazards and emergency response following a flood event. The agency conducts flood plain management studies in which ecological resources are cataloged and opportunities for restoring and preserving flood plains are identified. Under the Emergency Watershed Protection program, NRCS provides technical and financial assistance when a natural disaster causes damage in a watershed. Emergency response actions are related to assessing damages and identifying actions.

### ***5.4 State Legislation***

Senate Bill (“SB”) 218, the Disaster Relief Bill, was passed during the 1997 Legislative session. Nevada Revised Statutes (“NRS”) 353.2735, the resulting statute, established a state disaster relief account of \$4 million to help communities recover from damages sustained in the event of a disaster. The fund is administered by the Interim Finance Committee, and has been used to provide financial relief following river and flash flooding events in communities throughout the state.

SB 175, approved during the 2009 Legislative session, authorizes Washoe County to acquire and maintain a flood management project in the same manner as any other project authorized under existing law, and provides similar provisions for a municipality within the County. The bill also provides for the creation of a flood management authority by cooperative agreement and authorizes the issuance of bonds similar to the authority of other municipalities.

Assembly Bill 54, also approved during the 2009 session, authorizes the implementation of a flood-proofing and home elevation program in Washoe County including the ability to authorize grants and loans from flood project funds.

### ***5.5 History of Truckee River Flood Control Efforts***

Federal flood control projects are generally proposed and constructed under Congressional authority and assigned for implementation to various federal agencies. The NRCS, under the authority of the Watershed Protection and Flood Prevention Act, designed and constructed four flood detention facilities in Northwest Reno. The City of Reno’s responsibility was to provide lands, easements, right-of-way, and operation and maintenance of the facilities.

The US Department of the Interior, Bureau of Reclamation (under authorization of the Truckee River Storage Project Act and the Washoe Project Act) completed construction of Boca Reservoir in 1938, Prosser Creek Reservoir in 1963, and Stampede Reservoir in 1969. The ACOE, under authorization of the Flood Control Act of 1954, improved the bankfull capacity of the Truckee River channel to 7,000 cfs from the Glendale Bridge to Vista, including removal of the Vista Reefs and obstructions downstream from the Truckee Meadows to Pyramid Lake. Unfortunately this work, completed in 1963, resulted in flooding, bank erosion, and loss of fisheries and wildlife habitat downstream of Vista.

Under the Flood Control Act of 1962, the ACOE designed and constructed the Martis Creek Reservoir. This reservoir was completed in 1972 along with Truckee River channel improvements through Reno to improve the capacities to 14,000 cfs. Reno, Sparks, Washoe County, and the Carson-Truckee Water Conservancy District (“CTWCD”) are responsible for maintaining these 1972 channel capacities and the river gages that monitor the flood flows. The

CTWCD is responsible for the Truckee River from the state line to the Glendale Bridge in Reno. From the Glendale Bridge to the highway bridge in Wadsworth, the river is maintained by the State of Nevada. The Pyramid Lake Paiute Tribe ("PLPT") is responsible for the Truckee River between Wadsworth and Pyramid Lake.

In 1971, the ACOE completed a flood control management plan for the Truckee River reservoirs. Stampede, Boca, Prosser Creek, and Martis Creek Reservoirs have 65,000 acre feet ("af") of flood control space reserved from November to April each year. The operation of the reservoirs for flood control is to be coordinated to limit the flow in the Truckee River at Reno to a maximum of 6,000 cfs. The ACOE estimates that the flood control facilities mentioned above have reduced the 100-year flood flows through Reno from approximately 48,000 cfs to about 23,000 cfs, which still exceeds the Reno channel capacity of 14,000 cfs and the Sparks channel capacity of 7,000 cfs.

In July 1977, the ACOE, at the request of Reno, Sparks, and Washoe County, resumed investigation of alternatives for providing flood protection from the Truckee River through the Truckee Meadows. This investigation resulted in an adopted plan in 1985 consisting of channel improvements, levees, and detention facilities. This plan received Congressional authorization in 1988 and design proceeded.

An economic re-evaluation office report on the project completed in 1991 indicated that the project had an un-fundable benefit to cost ratio. This was due mainly to changes in the WRDA of 1986, which required the market value of public land already acquired to be included in the benefit-cost ratio even though project funds would not be required to purchase the land. As a result of that report the project was re-classified to a deferred status. In 1996, Washoe County asked the ACOE to activate the project and conduct a re-evaluation, which the ACOE initiated in fiscal year 1996-97. The ACOE completed a Reconnaissance Report in March 1998 and started work on a General Reevaluation Report, which is presently ongoing.

## ***5.6 Truckee River Flood Project***

In April 2000, Reno, Sparks and Washoe County created a community-based group known as the Community Coalition for Truckee River Flood Management. Diverse members of the community came together to develop flood management alternatives for Reno, Sparks and neighboring residents on the Truckee River. In 2003, the Coalition reached consensus on a locally preferred flood management plan ("LPP") and submitted it to the ACOE. In March 2006 the Flood Project Coordinating Committee adopted the LPP with additional details on downstream restoration and flood reduction elements. The LPP, also known as the Living River Plan, includes a variety of flood protection measures ~~described below~~. The Living River Plan was presented to the ACOE with the intent that it ~~would~~ ultimately be authorized and funded by Congress. Upon review, by the ACOE it was determined that the overall cost to construct the LPP plan as configured would be roughly cost \$1.6 Billion with a Benefit to Cost ratio of approximately 0.5. The cost and B/C ratio were deemed excessive and insufficient by the ACOE and therefore the LPP project was rejected by the Corps. The community then developed a much scaled down plan that would protect the community to the level of a 1% chance storm event and produced a report with the necessary sections and methods that could be submitted to the Corps for further review and acceptance for construction. Simultaneously, the ACOE reverted to study a lesser plan designed to protect the community to a 2% chance storm event (50-yr event). This plan was completed and in June of 2014, Congress authorized the Corps plan with a locally submitted amendment that would allow the TRFMA to submit the new locally

~~conceived plan at a later date. The ACOE is currently evaluating the LPP and is also re-evaluating an alternative plan called the National Economic Development (“NED”) plan.~~

### **5.6.1 Goals**

The Flood Project has ~~two~~<sup>three</sup> primary goals:

- 1) Reduce flood damages and deaths from a 1997-type flood (117-year event),
- 2) ~~Restore 50 miles of the Truckee River between Reno and Pyramid Lake, and~~
- ~~3) Provide enhanced~~<sup>limited</sup> recreational ~~and restoration~~ opportunities ~~and open space~~ in the region within the footprint of the currently planned flood infrastructure.

### **5.6.2 Partners**

The flood project is sponsored by a consortium of local partners, including the City of Reno, the City of Sparks, ~~the Community Coalition~~, Washoe County, Storey County, the Reno-Tahoe Airport Authority, PLPT, Reno-Sparks Indian Colony, the Community Coalition, and The Nature Conservancy. Washoe County is the managing partner, collecting the 1/8 cent sales tax authorized in 1999 to help fund the project, selling the bonds, holding title to the lands, and supporting the staff. The State of Nevada has become an important partner, contributing significant funding starting in 2005. State agencies involved in the project include the Department of Conservation and Natural Resources, Department of Wildlife, Division of Environmental Protection, Division of State Lands, and Division of Emergency Management. The Flood Project is being designed and built in cooperation with the ACOE. Other federal funding partners include the US Fish & Wildlife Service, US Bureau of Land Management (“BLM”), US Bureau of Reclamation (“BOR”) and FEMA.

#### **Joint Powers Authority**

Reno, Sparks and Washoe County executed an interlocal cooperative agreement that created a Joint Powers Authority (“JPA”) set up to govern the flood project consistent with the provisions of recent state legislation. The JPA is known as the Truckee River Flood Management Authority or TRFMA. SB 175, approved in June 2009, served as the basis for the new flood authority.

#### **Flood Project Coordinating Committee**

~~The Flood Project is overseen by the 23-member Flood Project Coordinating Committee (“FPCC”). The FPCC meets monthly to provide overarching policy direction to the project staff and approve expenditures of funds. The FPCC was created through a Cooperative Agreement among Reno, Sparks, Washoe County, and the University of Nevada, Reno (“UNR”) in 2005. Eight voting members represent those four primary partner organizations. The 15 nonvoting members are composed of managerial, technical and financial staff representing the primary partners, along with representatives of Storey County, the PLPT, the Community Coalition, the Working Group and the Reno-Tahoe Airport Authority.~~

### **5.6.3 Cost and Funding**

At an estimated cost of \$1.2 billion to \$1.6 billion, the Flood Project is the largest public works project ever undertaken in northern Nevada, combining ecosystem restoration, recreation and flood control together in one visionary, integrated effort. The ACOE is expected to contribute more than half of the project cost. The Flood Project is seeking funding in the President’s

Budget to complete the General Re-evaluation Report (“GRR”) and the Environmental Impact Statement (“EIS”), and initiate design work for the project in FY 2011.

Although the Flood Project is currently funded by a 1/8 cent sales tax, additional funds will be required to meet the local sponsor’s required funding contribution. It is expected that a flood protection fee encompassing one or more “Flood Funding Areas” will be established over time to meet the funding need.

A Flood Funding Study is underway to address the need for additional revenues to meet the local sponsor’s required funding contribution. ~~Alternatives developed as part of the study were presented to the Reno and Sparks City Councils and the Washoe County Board of Commissioners and each elected body agreed with a recommendation to have the Flood Project staff focus on the development of a Joint Powers Authority or a Regional Flood Control District.~~ The 2009 Nevada Legislature amended state statutes to enable the implementation of the selected governance model thereby allowing the TRFMA to collect the required flood fee. The TRFMA Board will be considering the adoption of a fee in 2015.

~~Local sponsors are also discussing which of the proposed flood project elements could be built with local funds only and what level of protection that would provide.~~

**5.6.4 Local Rate Plan ElementsProject Timing**

**Truckee River Flood Management Authority - Local Rate Plan**

<u>Elem #</u>	<u>Project Element Description</u>
-	-
-	<b><u>A. Downtown Reno Reach</u></b> <sup>1,3</sup>
<b><u>1</u></b>	<u>New Floodwalls: Provide a berm with a buried floodwall, with the top of the floodwall set to the 100-year water surface elevation.</u>
<b><u>1A</u></b>	<u>New Floodwalls (Geotechnical Recommendations): Drain trench along portions of the new floodwalls per Geotechnical Report.</u>
<b><u>1B</u></b>	<u>Pumping Station: Pumping station along Riverside Drive.</u>
<b><u>2</u></b>	<u>Replace Floodwalls: Replacement of old inadequate floodwalls from Arlington St. to Lake St.</u>
<b><u>3</u></b>	<u>Virginia Street Bridge: Recommendation unchanged.</u>
<b><u>3A</u></b>	<u>Booth Street Bridge: Remove Booth Street Bridge which constricts flows and increases flood water elevations.</u>
<b><u>4</u></b>	<u>Sierra Street Bridge: Unchanged from LPP.</u>
<b><u>5</u></b>	<u>Center Street Bridge: Unchanged from LPP.</u>
<b><u>6</u></b>	<u>Lake Street Bridge: Unchanged from LPP.</u>
<b><u>8A</u></b>	<u>Pedestrian Closure Gate Structures: Pedestrian gates are needed along the length of the floodwall to maintain the current pedestrian access points. A product such as FloodBreak or approved equivalent.</u>

<b><u>10</u></b>	<b><u>Floodproofing: Miscellaneous structures in Downtown Reno require floodproofing.</u></b>
<b><u>10A</u></b>	<b><u>Bank Stabilization and Bridge Protection: Bank stabilization around Wells Ave. Bridge protection at Arlington Ave Bridges and at Wells Ave Bridge.</u></b>
<b><u>10B</u></b>	<b><u>Pedestrian Bridges: Raise Pedestrian Bridge upstream of Arlington Ave. Remove existing pedestrian bridge at Wells Ave. Install new pedestrian bridge upstream of Wells Ave.</u></b>
<b><u>10C</u></b>	<b><u>Lands &amp; Damages: Lands and Damages cost for the Downtown project (not including Virginia Street Bridge).</u></b>
<b><u>10D</u></b>	<b><u>Planning, Engineering, and Design: Planning, Engineering, and Design for the Downtown project (not including Virginia Street Bridge).</u></b>
<b><u>10E</u></b>	<b><u>Construction Management: Construction Management for the Downtown project (not including Virginia Street Bridge).</u></b>
<b><u>10F</u></b>	<b><u>Jones Street Signal Improvements: Construct signal at Jones and Keystone Ave.</u></b>
-	-
-	<b><u>B. Truckee Meadows Reach <sup>2</sup></u></b>
<b><u>11</u></b>	<b><u>Sparks Levees and Floodwalls Glendale to Greg: Replacement of the existing levee on the north bank with on-bank floodwalls to minimize construction and right-of-way impacts to the TMWA Glendale Water Treatment Plant. Trail can be incorporated into floodwall maintenance road.</u></b>
<b><u>12</u></b>	<b><u>Sparks Levees and Floodwalls - Rock to McCarran: Replacement of the north bank levee with on-bank floodwalls to minimize impacts to existing properties and railroad spurs. Some minor terracing on the north bank. Fill localized low lying areas on the landside of the floodwall. Trail can be incorporated into floodwall maintenance road.</u></b>
<b><u>13</u></b>	<b><u>Sparks Levees and Floodwalls - McCarran to Vista: Replacement of existing levee with on-bank floodwalls for approximately 20,000 feet east of McCarran to reduce overall footprint. Construction of levees for most of the remainder of the reach. Floodwall will be used in the vicinity of Larkin Circle to eliminate impacts to the roadway.</u></b>
<b><u>14</u></b>	<b><u>Reno-Sparks Indian Colony Levee: No change. (Costs included in Elem 11 Sparks Levees and Floodwalls: Glendale to Greg)</u></b>
<b><u>15</u></b>	<b><u>Grand Sierra Floodwall: No change. (Costs included in Elem 11 Sparks Levees and Floodwalls: Glendale to Greg.)</u></b>
<b><u>16</u></b>	<b><u>Mill Street Levee - Greg to Rock: Reduced south bank floodplain terracing with the associated levee move closer to the Truckee River. Reduces excavation costs and reduces impact the existing Pioneer Ditch. (Costs included in Elem 11 Sparks Levees and Floodwalls: Glendale to Greg.)</u></b>

<b><u>17</u></b>	<u>Mill Street Levee - Rock to McCarran: Reduced south bank floodplain terracing with the associated levee move closer to the Truckee River. Reduces excavation costs and reduces impact the existing Pioneer Ditch. Pioneer Ditch will be piped to allow for use of the fill disposal area. (Cost included in Elem 12 Sparks Levees and Floodwalls: Rock to McCarran)</u>
<b><u>18</u></b>	<u>Main Station Farm Protection Levee: Levee eliminated. Main processing building is sufficiently elevated above flood waters. Will flood proof select buildings and elevate the pads under the hay storage barns to keep hay dry. (Costs included in Elem 31B: Lands and Damages)</u>
<b><u>19</u></b>	<u>Eastside Subdivision<sup>3</sup>: Voluntary home elevation.</u>
<b><u>20</u></b>	<u>Hidden Valley Levee<sup>3</sup>: Voluntary home elevation.</u>
<b><u>20A</u></b>	<u>Non-voluntary Home Elevation - Mitigation.</u>
<b><u>21</u></b>	<u>Crossing Improvements: No change</u>
<b><u>22</u></b>	<u>Rock Blvd Bridge: No bridge modifications. Levees/floodwalls and terracing will confine flood flows to existing bridge opening. Abutment and pier scour countermeasures may be required.</u>
<b><u>23</u></b>	<u>East McCarran Blvd. Bridge: No bridge modifications. Levees/floodwalls and terracing will confine flood flows to existing bridge opening. Abutment and pier scour countermeasures may be required.</u>
<b><u>24</u></b>	<u>Terracing Greg to Rock: Reduced terracing to reduce the amount of excavation and avoid the existing Pioneer Ditch. The terracing and associated levee are moved northward toward the Truckee River and levee ties into the McCarran Blvd bridge.</u>
<b><u>25</u></b>	<u>Terracing Rock to McCarran: Reduced terracing to reduce the amount of excavation and avoid the existing Pioneer Ditch. The terracing and associated levee are moved northward toward the Truckee River and levee ties into the Rock Blvd bridge. The land between Mill Street and the relocated levee can be used as a fill disposal site and reserved for future recreational use.</u>
<b><u>26</u></b>	<u>Terracing - McCarran to Steamboat: Terracing reduced on south bank along Treatment Plant.</u>
<b><u>27</u></b>	<u>North Benching along Living River Parkway: No changes. (Included in Elem 26 Terracing: McCarran to Steamboat)</u>
<b><u>28</u></b>	<u>Vista Narrows Widening: Expanded benching of the Narrows extending to the first railroad bridge.</u>
<b><u>29</u></b>	<u>North Truckee Drain: No change</u>
<b><u>31A</u></b>	<u>Bank Stabilization and Bridge Protection: Bank stabilization around Wells Ave. Bridge protection at Arlington Ave. Bridges and at Wells Ave. Bridge.</u>
<b><u>31B</u></b>	<u>Lands &amp; Damages: Lands and Damages cost for the LIP project (includes administrative and acquisition costs).</u>
<b><u>31C</u></b>	<u>Recreation: Recreation cost for LIP project.</u>
<b><u>31D</u></b>	<u>Cultural Resource Preservation: Cultural Resource preservation cost for LIP project.</u>
<b><u>31E</u></b>	<u>Planning, Engineering, and Design: Planning, Engineering, and Design for the entire project.</u>

<b>31F</b>	<u>Construction Management: Construction Management for the LIP project.</u>
-	-
-	<b><u>C. Lower Truckee River Reach:</u></b>
<b>32</b>	<u>Ecosystem Restoration: Lockwood: Completed</u>
<b>33</b>	<u>Ecosystem Restoration: Mustang/Peri Ranch: Mustang Ranch is completed - Peri Ranch restoration has been eliminated</u>
<b>35</b>	<u>Ecosystem Restoration: Tracy Power Plant: Underway</u>
<b>36</b>	<u>Ecosystem Restoration: 102 Ranch: Completed</u>
<b>43A</b>	<u>Rainbow Bend Home Elevation: Non-voluntary Home Elevation - Mitigation.</u>
<b>46</b>	<u>Wadsworth Levees: Levees eliminated in lieu of home elevations in this area.</u>
<b>46A</b>	<u>Wadsworth Non-voluntary Home Elevation - Mitigation.</u>

<sup>1</sup> Project designed to meet minimal 100-yr storm elevation with NO freeboard except at bridge replacements (2' assumed)

<sup>2</sup> Project design criteria adheres to FEMA mapping standards

<sup>3</sup> Project element not included in Local Interest Plan (LIP)

The flood project is currently in feasibility design to determine the NED plan, expected to be completed in December 2010. The draft EIS will be available for public review in April 2012. Authorization by Congress is anticipated in the fall of 2012 with a possible construction start by the ACOE in 2013. Local construction of the project began in August 2008 using local or non-ACOE funding.

### ***5.6.5—Plan Alternatives***

Two alternate versions of the Flood Project are being designed by the project team, the NED Plan and the LPP. The LPP is also known as the Living River Plan, the plan supported by the community. The project elements of the two plans are very similar, although each provides a slightly different level of flood protection.

#### **Living River Plan**

The following objectives have provided guidance for the development of the Living River Plan:

- ~~Achieve flood damage protection from at least a 100-year flood event on the Truckee River.~~
- ~~To the extent possible, the final design of the Flood Project should enhance and work with the river's dynamic natural functions as reflected in the living river approach developed by the Community Coalition.~~
- ~~Minimize floodwalls and flood structures where possible. Set floodwalls and flood structures back from the river to protect access and visibility.~~

- Evaluate redesign of all irrigation ditch intakes and diversion structures to reduce floodwall heights and minimize localized flooding. Where possible enhance and restore the river's natural ecosystem.
- Where possible enhance recreational opportunities and support the economic vitality of the region.
- Develop a flood protection management plan to ensure that the flood project is not rendered obsolete in the future, or have land use changes lower the level of protection.
- Regarding the UNR Main Station Farm ("the Farm") (in implementing the Flood Project) work with UNR to:
  - Maintain UNR's maximum use of the land at the Farm to implement its agricultural mission
  - Protect the regional investment in the reclaimed water system at the Farm to maintain and enhance Truckee River water quality improvements. UNR budget cuts in 2010 have prompted discussion concerning the fate of the Farm. Reduced operations are expected as UNR evaluates the incorporation of agricultural programs into other UNR colleges and how the Farm will serve future programs. Plans for the Southeast Connector and Mill Street extension also create demands for UNR Farm land. The FPCC has discussed how to balance the land requirement of the Flood Project with the needs of UNR, and how UNR should be represented on the Flood Project governing body in the future.
- The design for the downtown Reno features shall maintain and enhance the Truckee River as an aesthetic attribute to downtown Reno and the community. The design shall maintain public access to the river.

The following sections describe the project elements of the Living River Plan that have been approved by the FPCC as of October 2009. Project elements are described briefly and locations are shown on one of four maps (Figures 5-2 through 5-5). For more complete descriptions, go to the Flood Project website: [www.truckeeflood.us](http://www.truckeeflood.us).

The Living River Plan was initially approved by the FPCC in 2006. The plan in previous forms was also approved by resolution of the three entities two times between 2000 and 2005. Since that time, the FPCC has approved plan amendments to increase flood protection in the Truckee Meadows from a 100-year event to a 117-year event, replace (instead of rehabilitate) the bridges at Virginia Street and Center Street, include fish passage, flood plain acquisition, non-structural project elements, such as floodproofing, home elevation, buyout, financial assistance and model development, and to include bank stabilization and bridge improvements.

Some Flood Project elements are still under development, including interior drainage (moving water from behind flood structures and floodwalls), and the open space and recreation plan. It is expected that some or all of these elements will be added into the Living River Plan over time. Project elements will also continue to be updated and improved as more technical information is obtained.

### **5.6.6—Structural Elements**

#### **Downtown Reno Reach**

1. New Floodwalls: Flood structures or floodwalls along the north bank of the Truckee River from upstream of Booth Street to Arlington Street, as space permits;

2. ~~Replace Floodwalls: Replacement of the old and inadequate floodwalls from Arlington Street to Lake Street;~~
3. ~~Virginia Street Bridge: Replace Virginia Street Bridge which constricts flows and increases flood water elevations, with a new bridge that is hydraulically efficient and capable of passing the 100-year flood;~~
4. ~~Sierra Street Bridge: Replace Sierra Street Bridge which constricts flows and increases flood water elevations, with a new bridge that is hydraulically efficient and capable of passing the 100-year flood;~~
5. ~~Center Street Bridge: Replace Center Street Bridge which constricts flows and increases flood water elevations, with a new bridge that is hydraulically efficient and capable of passing the 100-year flood;~~
6. ~~Lake Street Bridge: Replace Lake Street Bridge which constricts flows and increases flood water elevations, with a new bridge that is hydraulically efficient and capable of passing the 100-year flood;~~
7. ~~On-Bank Floodwalls: Construction of "on-bank" floodwalls set back from the channel banks to fit existing conditions and features to contain flood flows in areas where replacing the existing floodwall is not feasible;~~
8. ~~Temporary closure structures at bridges to prevent floodwater from leaving the river channel and flowing down the streets;~~
9. ~~Flood structures and floodwalls, as needed, to contain flood flows from Lake Street to US 395.~~

### **Meadows Reach**

10. ~~Sparks Floodwalls and Flood Structures: Glendale to Greg: Replacement and/or enhancement of the flood structures along the north side of the Truckee River from Glendale to Greg in such a manner that the flood structures blend into the park areas along the river, and floodwalls are constructed to a minimum height and combined with flood structures or berms wherever possible, to reduce the height of the wall and the footprint of the flood structure and hide the view of the floodwall as much as possible from the riverside. This project element would also involve the evaluation of areas that do not have enough room for flood structures as to whether it is better to construct a floodwall in that location or purchase additional rights-of-way to allow construction of a lower flood structure.~~
11. ~~Sparks Flood structures and Floodwalls: Rock to McCarran: Replacement and/or enhancement of the flood structures along the north side of the Truckee River from Rock to McCarran in such a manner that the flood structures blend into the park areas along the river, and floodwalls are constructed to a minimum height and combined with flood structures or berms wherever possible, to reduce the height of the wall and the footprint of the flood structure and hide the view of the floodwall as much as possible from the riverside. This project element would also involve the evaluation of areas that do not have enough room for flood structures as to whether it is better to construct a floodwall in that location or purchase additional rights-of-way to allow construction of a lower flood structure.~~
12. ~~Sparks Flood structures and Floodwalls: McCarran to Vista: Replacement and/or enhancement of the flood structures along the north side of the Truckee River from McCarran to Vista in such a manner that the flood structures blend into the park areas along the river, and floodwalls are constructed to a minimum height and combined with flood structures or berms wherever possible, to reduce the height of the wall and the~~

footprint of the flood structure and hide the view of the floodwall as much as possible from the riverside. This project element would also involve the evaluation of areas that do not have enough room for flood structures as to whether it is better to construct a floodwall in that location or purchase additional rights-of-way to allow construction of a lower flood structure.

13. Reno Sparks Indian Colony Levee: Levee is located about 30 feet from the top of the bank along the south side of the river from Highway 395 to Glendale Avenue.
14. Grand Sierra Flood structure: Construction of a short floodwall along the Grand Sierra property line from Glendale Avenue to Greg Street, and, if the wall is higher than four feet, consideration shall be given to providing containment in this section by raising the Hilton's internal parking lot road. The parking areas between this road and the river would then be allowed to flood.
15. Mill Street Flood structure: Greg to Rock: Construction of set-back flood structures on the south side of the river starting from the abutment of the Greg Street Bridge, roughly following the alignment of the existing Pioneer irrigation ditch to the north side of Mill Street near its intersection with Rock Boulevard, in such a manner so that the flood structure ties into the Rock Boulevard embankment where the top elevation of the flood structure matches the road shoulder.
16. Mill Street flood structure: Rock to McCarran: Construction of set-back flood structures from the tie into Rock Boulevard, following the north side of Mill Street to McCarran Boulevard, at which point the flood structure would tie into the McCarran Boulevard embankment, where the elevation of the top of the flood structure matches the road shoulder. Depending on the ultimate use of the Excel Building, at Edison Way the flood structure could become a floodwall along the south side of the building and return to a flood structure east of the building. The building could also be flood-proofed.
17. Main Station Farm Protection Flood structure: Construction of a flood structure around the UNR's Main Station Farm's buildings near the intersection of Clean Water Way and McCarran Boulevard
18. Eastside Subdivision: (see nonstructural elements below)
19. Hidden Valley Flood structure/Floodwall: Construction of a flood structure or floodwall along the east bank of Steamboat Creek from Pembroke Lane north until it ties into natural ground so as to protect the low houses in the "Pebble Beach" area. It has been determined that elevating these houses will be less costly than constructing a flood structure/floodwall.
20. Crossing Improvements: Improvements as may be needed where Dry Creek and Boynton Slough cross South McCarran, Peckham Lane, Longley Lane and McCarran Boulevard.
21. Rock Boulevard Bridge: Lengthen Rock Boulevard Bridge to reduce the flood levels caused by the existing bridge.
22. East McCarran Boulevard Bridge: Lengthen McCarran Boulevard Bridge to reduce the flood levels caused by the existing bridge.
23. Terracing: Greg to Rock: Construction of terraces along the south side of the channel from Greg Street to Rock Boulevard (which would vary in width) to provide additional flow conveyance and ecosystem restoration. They will have two levels, so that the lower level shall be at the elevation of a normal year's high flow and the higher bench shall be about four feet higher.
24. Terracing: Rock to McCarran: Construction of terraces along the south side of the channel from Rock Boulevard to McCarran Boulevard that vary in width to provide

additional flow conveyance and ecosystem restoration. They will have two levels, so that the lower level shall be at the elevation of a normal year's high flow and the higher bench shall be about four feet higher.

25. Terracing: McCarran to Steamboat: Construction of terraces along the south side of the channel from McCarran Boulevard to Steamboat Creek that vary in width to provide additional flow conveyance and ecosystem restoration. They will have two levels, so that the lower level shall be at the elevation of a normal year's high flow and the higher bench shall be about four feet higher.
26. North Benching along Living River Parkway: Possible excavation of the "point" on the north side of the river to provide additional flow capacity to compensate for the reduced flow area if the Mill Street Flood structure is constructed north of the Excel, Cooperative Extension, and some Edison Way buildings (may not be necessary if flood structure is constructed south of these buildings as currently proposed by Flood Project). The current LPP calls for the Mill Street Flood structure to be on the south side of the Edison Way buildings.
27. Vista Narrows Widening: Construction of terraces in the channel from the confluence with Steamboat Creek to the first railroad bridge east of Sparks to control flows leaving the Truckee Meadows and achieve the required flood elevations in the Truckee Meadows.
28. North Truckee Drain: Relocation of the terminus of the North Truckee Drain to a point near where the river is adjacent to the railroad tracks and enters the East Truckee Canyon on the east side of the East Sparks Industrial Park, consisting mostly of an underground box culvert.
29. Tributary Protection (if still needed): Construction of flood structures and floodwalls to extend up the tributaries to the Truckee River far enough so flooding from Truckee River backwater does not occur behind them. These flood structures shall extend further upstream if their presence causes the 100-year flood event from an individual tributary to spill over behind the flood structure or floodwall.
30. Huffaker Detention Facility (Withdrawn): Construction of a detention facility at Huffaker Narrows, incorporating the function of the detention basin for Double Diamond into the final design so that the maximum water level in the detention facility for a 100-year flood event on the Truckee River and/or Steamboat Creek occurs at elevation 4,435. This detention basin would be bounded on the south side along the alignment of the proposed South Meadows Parkway extension.

### **Lower Truckee River Reach**

31. Ecosystem Restoration: Lockwood Restoration of the Truckee River downstream of Vista at Lockwood where restoration is feasible to increase sinuosity, connect the river to the flood plain, mitigate for loss of flood plain storage due to construction of floodwalls and flood structures upstream, and correct the damage done to the river from previous channelization projects.
32. Ecosystem Restoration: Mustang/Peri Ranch Restoration of the Truckee River downstream of Vista at Mustang Ranch where restoration is feasible to increase sinuosity, connect the river to the flood plain, mitigate for loss of flood plain storage due to construction of floodwalls and flood structures upstream, and correct the damage done to the river from previous channelization projects.
33. Granite Pit: This site is being analyzed for a potential disposal area replacement site for excess materials which will be excavated in the benching process upstream.

34. Ecosystem Restoration: Tracy Power Plant Restoration of the Truckee River downstream of Vista at the Tracy Power Plant where restoration is feasible to increase sinuosity, connect the river to the flood plain, mitigate for loss of flood plain storage due to construction of floodwalls and flood structures upstream, and correct the damage done to the river from previous channelization projects.
35. Ecosystem Restoration: 102 Ranch Restoration of the Truckee River downstream of Vista at 102 Ranch where restoration is feasible to increase sinuosity, connect the river to the flood plain, mitigate for loss of flood plain storage due to construction of floodwalls and flood structures upstream, and correct the damage done to the river from previous channelization projects.
36. Ecosystem Restoration: Eagle Pitcher Restoration of the Truckee River downstream of Vista at Eagle Pitcher where restoration is feasible to increase sinuosity, connect the river to the flood plain, mitigate for loss of flood plain storage due to construction of floodwalls and flood structures upstream, and correct the damage done to the river from previous channelization projects.
37. Ecosystem Restoration: Ferretto Ranch Restoration of the Truckee River downstream of Vista at Ferretto Ranch where restoration is feasible to increase sinuosity, connect the river to the flood plain, mitigate for loss of flood plain storage due to construction of floodwalls and flood structures upstream, and correct the damage done to the river from previous channelization projects.
38. Ecosystem Restoration: Railroad Cut Restoration of the Truckee River downstream of Vista at Railroad Cut where restoration is feasible to increase sinuosity, connect the river to the flood plain, mitigate for loss of flood plain storage due to construction of floodwalls and flood structures upstream, and correct the damage done to the river from previous channelization projects.
39. Ecosystem Restoration: I-80 Rest Stop Restoration of the Truckee River downstream of Vista near the I-80 rest stop by Wadsworth where restoration is feasible to increase sinuosity, connect the river to the flood plain, mitigate for loss of flood plain storage due to construction of floodwalls and flood structures upstream, and correct the damage done to the river from previous channelization projects.
40. Ecosystem Restoration: Above the I-80 Bridge Restoration of the Truckee River (downstream of Vista and upstream of the I-80 bridge) where restoration is feasible to increase sinuosity, connect the river to the flood plain, mitigate for loss of flood plain storage due to construction of floodwalls and flood structures upstream, and correct the damage done to the river from previous channelization projects.
41. Ecosystem Restoration: Wadsworth Restoration of the Truckee River downstream of Vista at Wadsworth where restoration is feasible to increase sinuosity, connect the river to the flood plain, mitigate for loss of flood plain storage due to construction of floodwalls and flood structures upstream, and correct the damage done to the river from previous channelization projects.
42. Rainbow Bend Benching: Construction of three excavated benches along the Truckee River, one at the Canyon Way Bridge, one on the north side of the River across from the Canyon General Improvement District ("GID") Wastewater Treatment Plant, and one on the south side of the river just east of the Canyon GID Wastewater Treatment Plant ("WTP") to protect the WTP abutment from flood scour; protect the Rainbow Bend community from increased flood flows due to construction of project elements upstream; and provide additional capacity for flood flows in the river especially near the Canyon Way Bridge.

~~43. Rainbow Bend Walkway: Construction of a low-elevated walkway (approximately 1/2 mile long) along the south side of the river by Rainbow Bend to protect the Rainbow Bend community from increased flood flows due to construction of project elements upstream.~~

~~44. Painted Rock Railroad Bridge: Elevation of the Trestle Bridge at Painted Rock to elevate it above 117-year flood waters.~~

~~45. Wadsworth Flood structure: Construction of a flood structure at Wadsworth to protect the community from flooding due to the 117-year flood.~~

### ~~**Fish Passage and Recreation Elements**~~

~~Fish Passage: Construct features along the Truckee River that improve fish passage including bypass channels, intake pumps, fish screens, and the modification, relocation, or removal of barriers (such as dams and diversions).~~

~~Recreation: Construct, on property acquired for flood damage reduction or ecosystem restoration, recreational features such as multi-use trails, fishing and boating access sites, picnic areas and playing fields.~~

INSERT

~~Figure 5-2 Flood Project Locations: Truckee Meadows (A)~~

~~Figure 5-3 Flood Project Locations: Truckee Meadows (B)~~

~~Figure 5-4 Flood Project Locations: Lower Truckee River (A)~~

~~Figure 5-5 Flood Project Locations: Lower Truckee River (B)~~

## 5.6.7 Non-Structural Elements

### *Downtown Reno Reach*

~~Non-structural Commercial and Residential Floodproofing—Four structures would require non-structural floodproofing with this alternative. Three are located on the south bank (two are residential condominiums near Barbara Bennett Park) and one is a single family residence. There is also a commercial building near Brick Park on the north bank. Structures at the 525 Court Street location, including the Promenade senior resort living center and Heritage Bank of Nevada, as well as the structures along the 200 block of Island Avenue between Arlington Avenue and Rainbow Street would undergo flood-proofing measures that would further protect these buildings from overbank flows under the Living River Plan. Further downstream, the historic Post Office building on the south bank between Virginia Street and Center Street may also undergo flood-proofing.~~

### *Meadows Reach*

~~Non-structural Residential Floodproofing—An alternative may include flood-proofing for certain residences in Hidden Valley and buildings in the Eastside Subdivision south of the UNR Main Station Farm. The channel benching plan requires flood-proofing of 59 residences in the Boynton Slough and Pembroke Drive areas. The method of flood-proofing would probably vary from structure to structure, but all would be raised to at least the 100-year flood elevation. Assembly Bill 54, approved in May 2009, authorizes the implementation of a flood-proofing and home elevation program in Washoe County including the ability to authorize grants and loans from Flood Project funds.~~

## 5.6.58 Other Measures

### **Joint Powers Authority**

~~Reno, Sparks and Washoe County are discussing the development of an interlocal cooperative agreement that would create a Joint Powers Authority (“JPA”) to govern the flood project consistent with the provisions of recent state legislation. SB 175, approved in June 2009, authorizes Washoe County to acquire and maintain a flood management project in the same manner as any other project authorized under existing law, and provides similar provisions for a municipality within the County. The bill also provides for the creation of a flood management authority by cooperative agreement and authorizes the issuance of bonds similar to the authority of other municipalities. A summary of key provisions being contemplated includes the authority to plan and construct, own, operate and maintain the project. In addition, certain emergency, regulatory and revenue powers are also contemplated. The summary of possible provisions can be viewed at [www.truckeeeflood.us](http://www.truckeeeflood.us).~~

### **Planning and Regulatory Functions**

It is contemplated that the JPA may propose plans and regulatory measures, consistent with existing development codes, to protect the flood management facilities and mitigate the adverse impact that new development may have on flooding and on the level of protection the facilities are designed to provide. The plans and regulatory measures would be developed in collaboration with the JPA member’s planning staffs and proposed, as appropriate, for approval

and inclusion in the local government development codes. Regulatory functions may also include establishing a flood impact analysis procedure and process to measure the possible impact of land uses and development projects on the flood management facilities. This process may utilize a regional hydrologic modeling tool.

### **Regional Hydrologic Model**

The Flood Project has ~~completed~~initiated the development of a regional hydrologic model ~~with Manhard Engineering. The first phase includes analysis of various regional hydrologic model approaches and techniques with the ultimate goal of developing a model for the Truckee River Watershed. During Phase I, various model options would be tested on a much smaller watershed, the Sun Valley watershed, for which highly reliable data is available as a calibration tool. The results of the first phase effort would then be applied to the entire Truckee River watershed in a later phase of the project.~~

~~A regional hydrologic model is being built. Phase 1 looked at four potential software packages that could be used for this effort to determine which would provide the best results at predicting increased flood risk and impact due to land use changes in the watershed. This software and the modeling process learned from the pilot project (Sun Valley Dam watershed) would then be used for developing the rest of the model across the Truckee River Watershed above the Vista Gage.~~ This model will be run when land use changes are being considered so the potential adverse flood impacts can be estimated. The Flood Project would then pass this information on to the project reviewing entities (for those that would result in land use changes). The process will enable the entity to provide adequate and proper conditions when reviewing permit applications to assure the safety of the public and to ensure that flood protection is not adversely impacted or decreased. This Regional Hydrologic Model could also be used to study watershed impacts due to land use changes and develop recommendations for design criteria for development projects. The Flood Project will be required by the ACOE to monitor the watershed, evaluate changes to the watershed and annually report to the public on the project's level of protection.

### **Flood Plain Storage and Critical Flood Pools**

Flood plain storage is a critical component of flood protection. Many properties that were built in compliance with FEMA standards for the NFIP may be at risk because of loss of flood plain storage. Reno, Sparks, Washoe County and Flood Project staff members involved in flood plain storage volume mitigation seek to ensure that the Flood Project remains feasible and future flood impacts are minimized.

The Flood Project staff is working with local government agencies to take the following action steps:

- Develop flood plain storage mitigation options or plans to ensure that flood elevations are not increased, placing an undue burden on property owners and existing development in the Truckee Meadows and downstream.
- Work in a cooperative manner to implement the Flood Project and the *Regional Flood Plain Management Strategy* (RWPC, 2003). Special attention is directed to land acquisition and early implementation of Flood Project elements that are critical to the preservation of flood storage and/or the feasibility of any of the project alternatives.

- Jointly develop and formally adopt the best available technical data on the hydrology and hydraulics of flooding as used by the Flood Project (being developed in coordination with the ACOE).
- Complete the regional hydraulic modeling tool needed to quantify cumulative flooding impacts in the watershed.
- Use best efforts and good faith to jointly develop flood plain storage mitigation guidelines that will be incorporated into local ordinances and development codes. This will facilitate the ability of property owners to develop their properties and/or participate in regional solutions for mitigation of increased volume of runoff or loss of flood plain storage volume if appropriate. Local ordinances will also provide a mechanism for monitoring and enforcement.
- Provide background information and public outreach to ensure support from the community and from elected officials for the region's interconnected flood policies and projects.

Ultimately, flood plain storage mitigation will need to address the following:

- Ensure that current flood impacts and flood conditions are “locked into place” in order to maintain post-construction levels of protection. Mitigation measures should be designed to minimize current flood impacts to existing residents and businesses and also to prevent flood impacts from getting worse over time.
- Properties in Zone 1, as described in Policy 3.1.b, will be under the most stringent development constraints because they are in the most critical flood plain storage volume areas. (See Figure 5-2.)
- Properties in Zone 2, as described in Policy 3.1.b, are in a unique situation because displacement of flood plain storage may cause increased flood impacts to nearby properties under current conditions. Once the Flood Project is implemented, the flood plain storage volume associated with these properties will no longer need to be maintained.
- Properties in Zone 3, as described in Policy 3.1.b, are important areas in terms of flood conveyance under current conditions. Once the Flood Project is implemented, the flood plain storage volume and conveyance associated with those properties in Zone 3 will no longer need to be maintained. However, current conditions of water volume and peak discharge must be maintained after the project is implemented or the local interior drainage design may be undersized and in need of improvements. Displacement and reduction in floodplain storage volume in Zone 3 will tend to increase flood elevations from the present time to the time the flood project is completed.
- Properties in Zone 4, as described in Policy 3.1.b, may impact the hydrology of the Flood Project if there is a significant change to the flow rates, timing, duration or volume of runoff from the property.
- Larger projects will be expected to provide a higher level of analysis and may be required to contribute to a possible future regional solution that provides mitigation for the loss of flood plain storage volume in Zone 1 or hydrologic changes in Zones 3 and 4.
- Smaller projects will not be expected to provide undue levels of analysis, but may also be expected to contribute to a possible future regional solution that provides mitigation for the loss of flood plain storage volume or increases in flow rate, velocity and volume due to land use changes.

Where appropriate, maximize the opportunity to receive credits under FEMA's Community Rating System for protection of properties, which may result in flood insurance premium price reductions under the NFIP.

Mitigation options will be identified which may include any or all of the following:

- Local government purchase of existing excess storage volume to be reserved for offsetting the impacts caused by developments
- Local government implementation of storage mitigation projects to be reserved for offsetting the impacts caused by developments
- Private developer creation of storage mitigation projects to mitigate the impacts caused by larger developments and/or to sell additional storage for offsetting the impacts caused by developments
- Creation of a framework to allow local governments to buy and sell storage to offset impacts caused by developments
- Generally, mitigation should be provided in an area hydrologically or hydraulically connected to the project requiring mitigation in a way that will not increase flood levels by any amount.
- Early implementation of flood project elements is an option for providing mitigation.

In March 2004, Reno amended its Land Development Code (Section 18.12.605 - Critical Flood Pools) to be consistent with Policy 3.1.b, below, initially adopted by the RWPC earlier that year to address the need to mitigate losses of flood plain storage in critical flood pools. Similarly, Washoe County amended its Development Code (Section 110.416.18 Critical Flood Storage Areas) in February 2005.

In October 2008, the FPCC adopted "Resolution number 2008-1, A Resolution Proposing Principles and Guidelines to be used as a Basis for Adoption of Local Ordinances for Floodplain Storage Mitigation within Critical Flood Zone 1." The resolution, developed in coordination with Reno, Sparks and Washoe County flood management staff, strongly recommends mitigation requirements for all projects proposing to displace any volume of flood water in Zone 1. Specifically, storm water discharges should be limited to pre-development peak flows and flood storage volume mitigation should achieve no adverse impact. This would be achieved by providing mitigation in a volume equal to the volume of flood storage displaced, in the same flood storage area, at the same elevation and at the same time or prior to displacement. If volume mitigation is proposed in a different flood storage area or at a different elevation, the Flood Project Mitigation Model would be used to show no adverse impact. The resolution also includes definitions for key terms, such as "no adverse impact" and "flood storage area" and a reference map.

In September 2010, Reno initiated amendments to Section 18.12.605 of its Land Development Code that are consistent with the resolution. The Reno City Council approved the ordinance in October 2010. Washoe County has developed proposed amendments to its Development Code (Section 110.416.18 Critical Flood Storage Areas), also to be consistent with the resolution.

### **Policy 3.1.b: Flood Plain Storage within the Truckee River Watershed**

*Until such time as Reno, Sparks, and Washoe County adopt and begin to implement a Flood Plain Management Plan for the Truckee River, the local flood management staff<sup>2</sup>, using the best technical information available and applicable local ordinances, will work with a proposed project applicant or a proposed land use change applicant to determine the appropriate level of analysis required in order to evaluate and mitigate the impacts experienced during the 1997 flood. On an annual basis, all three local flood management agencies and the Flood Project shall jointly agree on and adopt the “best technical information” available for use in implementation of this policy.*

**Criteria to implement policy:** The local flood management staff shall evaluate impacts using qualitative or quantitative analysis and the evaluation may be uncomplicated and brief. If a more in-depth analysis is appropriate, the following “tiered” approach and criteria shall be used unless otherwise required by local ordinance:

- Current development codes require that a project not increase the 100-year peak flow at the boundary of the property. If the project can also demonstrate no increase in volume of 100-year runoff at the boundary of the property, the analysis is complete.
- If there is an increase in 100-year volume of runoff at the boundary of the property, the project may demonstrate either:
  - The increase in volume of runoff will have no adverse impact to downstream properties and no adverse impact to hydrologically connected properties, or
  - The increase in volume of runoff will be mitigated in a regional project without adverse impact to hydrologically connected and downstream properties. (Until a storage mitigation plan is in place with respect to this paragraph, no flood plain storage mitigation will be required.)
- Impacts of a proposed project will be evaluated by comparing conditions without the proposed project (current conditions) and conditions with the proposed project.
- Impacts of a proposed land use change will be evaluated by comparing conditions without the proposed land use change (current conditions) and conditions with the buildout of the reasonable development potential of the proposed land use change.

The watershed is divided into four zones with different project size thresholds for the purposes of review (See Figure 5-~~26~~):

Zone 1: Critical flood pool – all proposed land use changes and proposed projects will be reviewed for their impact on hydrologically connected and downstream properties

Zone 2: Existing flood pool that will be removed from the flood pool by the proposed Truckee River Flood Project – proposed land use changes and proposed projects five acres and larger will be reviewed

Zone 3: Adjacent sheet flow areas not part of the flood pool – proposed land use changes and proposed projects five acres and larger will be reviewed

Zone 4: Remainder of the Truckee River Watershed – proposed land use changes and proposed projects five acres and larger will be reviewed

---

<sup>2</sup> Each local government has assigned one or more staff members the responsibility of designing and reviewing flood management projects. These staff members are also responsible for reviewing certain proposed projects to address concerns of drainage and flooding.

INSERT

**Figure 5-26 Critical Flood Zone Areas**

## **Flood Monitoring**

### **Early Warning Program**

The Flood Early Warning System consists of gages and associated equipment intended to provide critical storm and weather information to various agencies within northern Nevada for the purposes of supporting emergency preparations in advance of devastating floods. The system includes 54 local and United States Geological Survey (“USGS”) sponsored stream and precipitation gages, transmission equipment, computer data collection and distribution system, and equipment and software to transform the data into useable information for regional emergency flood response. In addition to stream and precipitation gage data, staff relies on data from 121 additional gages paid for and managed by other organizations. In total, there are 175 gages in the regional hydrologic data network.

### **Flood Plain Management Plan**

Flood plain management generally consists of planning and implementing programs designed to alleviate the impact of flooding on people and communities. It includes activities such as instituting land use policies and regulations for development in flood prone areas, and restoring and preserving natural resources and functions of flood plains and contributing watersheds. The Flood Project, in order to receive federal cost share funds through the ACOE is required to have in place and ready to implement, a flood plain management plan that deals with the impacts to the Flood Project caused by changes in the watershed. Such changes could reduce the Flood Project’s level of protection and therefore reduce the benefit coming from federal funds spent on the project.

Flood plain management can include both structural and non-structural measures for mitigating flood impacts. Structural approaches include measures that reduce the amount of floodwater in a stream or contain floodwater in a channel so that it does not inundate nearby areas. Such measures may include detention facilities, flood structures or dikes and floodwalls. Structural measures built with public money have been used historically to manage existing flood impacts with varying degrees of success. Structural flood controls may require the use of valuable land and natural resources. A structural approach to flood control in existing urban areas can provide a cost-effective benefit to the public. In southern Nevada, the Clark County Regional Flood Control District uses structural controls very effectively to manage flash flooding impacts in developing areas.

Non-structural approaches to flood plain management are being used increasingly as the limitations of flood control become apparent. The most cost-effective approach to flood hazard protection can be achieved using land use planning and sound flood plain management regulations in flood prone areas. Non-structural approaches to flood plain management include:

- Development of tools to monitor changes in the watershed and better understand changes to the hydrologic response of the watershed due to land use changes and transmittal of recommendations to local government
- Development of regional master plans for flood management
- Mapping and study of historic flood prone areas
- Implementation of flood plain regulations, including zoning ordinances, subdivision regulations, and building codes that guide development in flood plains and flood prone areas

- Implementation of a development review process at the local or regional level
- Acquisition and removal, or relocation of structures which experience repetitive losses
- Flood proofing existing structures by elevating a building's structure or infrastructure, or sealing and reinforcing walls, doors and windows
- Flood forecasting and warning systems
- Disaster preparedness plans
- Rehabilitation of disturbed watersheds, wetlands, and riparian zones
- Designation of green belts
- Providing education and information to the local communities

Although flood plain management most effectively occurs at the local or regional level, the state plays an important role. The state's primary functions include coordination between federal and local agencies, education and information dissemination, and management of grant funds passed through from the federal government or the state to the local communities.

### **Watershed Effects on the Project**

Changes in land use cause changes in the volume, flow rate, timing and velocity of storm water runoff, which usually increases flood risk and flood damages in the watershed. Such changes can also increase damages (due to erosion and sedimentation caused by flooding), which can have an adverse impact on the capacity of conveyance features, in addition to water quality; the condition of stream channels and banks; other public or private facilities that extend across (or are located in the flood plains of streams or flood/drainage conveyance channels); basins or other facilities.

### **Linkages**

Water Quality / Total Maximum Daily Load ("TMDL")

***In addition to a properly functioning river channel and floodplain, ecosystem restoration on the lower Truckee River enhances nutrient assimilative capacity, which helps control undesirable algae growth, dissolved oxygen problems and other water quality issues.***

Upstream (California) Dam Operations / *Truckee River Operating Agreement* ("TROA") releases from Lake Tahoe at the Tahoe City Dam according to TROA will have an effect on flood flows in the Truckee Meadows.

Local Government Flood Control and Drainage Programs may use modeling tools developed by the Flood Project to perform planning and regulatory functions.

Recreation Flood Project Plans provide numerous recreational opportunities including the River Parkway concept.

## **5.7 Local Storm Water Drainage Programs**

Reno, Sparks and Washoe County must each provide for adequate drainage systems to convey storm water in order to preserve and promote public health, safety, welfare, and economic well being. The need for adequate drainage affects all governmental jurisdictions and all parcels of

property and therefore requires coordination among the jurisdictions and the Flood Project, and cooperation from both the public and private sectors.

Flood plain management and drainage facilities are two main components of each jurisdiction's storm water drainage program. In addition, drainage program staff members actively participate in planning and engineering for the Flood Project.

### ***5.7.1 Drainage Facilities***

Local storm water drainage facilities typically include curb and gutter, inlets and storm sewers, culverts, bridges, swales, ditches, channels, detention facilities, or other drainage infrastructure required to convey storm runoff to its ultimate drainage way. The Reno, Sparks and County Public Works Departments are involved primarily in drainage improvements funded, designed or constructed by local governments, or where these functions are performed in cooperation with other groups or partners. Many other public drainage facilities are constructed and paid for by developers, with oversight provided by the Community Development Departments. Once constructed and dedicated to the local government, maintenance of drainage facilities becomes the responsibility of the Public Works Departments or entities such as homeowner's associations. The local governments administer drainage programs within their respective jurisdictions as set forth in the drainage code sections shown in Table 5-2.

**Table 5-2 Needs to be reviewed/updated by Reno, Sparks and WC to insure references are still valid**

**Table 5-2 Drainage Code References for Reno, Sparks and Washoe County**

<b>Jurisdiction</b>	<b>Reference</b>	<b>Entitled</b>	<b>Description</b>
City of Reno	12.04.010 Article IV Reno Administrative Code, Title 12, Public Works and Utilities	Standard Specifications for Public Works Construction	Adopts "Standard Specifications for Public Works Construction" published by RTC ("Orange Book")
	12.16 Article IV Reno Administrative Code, Title 12, Public Works and Utilities	Storm Water Management and Discharge Control	Regulates storm water discharge procedures
	18.12.701 Article VII Reno Administrative Code, Title 18, Annexation and Land Development ("Land Development Code")	Streets	Adopts "City of Reno Public Works Design Manual" which contains current storm drainage policies and technical design criteria in Chapter 2
	18.12.1701 Article XVII of Land Development Code	Flood Hazard Areas	FEMA Flood Requirements
	18.12.1801 Article XVIII of Land Development Code	Wetlands and Stream Environment Protection Standards	Establishes regulations pertaining to wetlands and stream environments
	18.12.1901 Article XIX of Land Development Code	Drainage Way Protection Standards	Establishes setbacks from select waterways and regulates the uses in those setbacks
City of Sparks	Sparks Municipal Code, Title 15, Chapter 15.11	Flood Plain Management	FEMA Flood Requirements
	Sparks Municipal Code, Title 17, Chapter 17.16, Section 17.16.140	Drainage	Subdivision drainage requirements

**Table 5-2 Drainage Code References for Reno, Sparks and Washoe County - Continued**

<b>Jurisdiction</b>	<b>Reference</b>	<b>Entitled</b>	<b>Description</b>
Unincorporated Washoe County	Chapter 110 Development Code, Article 416	Flood Hazards	FEMA flood requirements
	Chapter 110 Development Code, Article 418	Significant Hydrologic Resources	Establishes setbacks from select waterways and regulates uses in setbacks
	Chapter 110 Development Code, Article 420	Storm Drainage Standards	Current policies and technical design criteria
	Ordinance 1223	Storm Water Discharge Ordinance	Regulates storm water discharge procedures

The Reno flood and drainage staff operates within the Sanitary Engineering Section of the Public Works Department. Staffing and a limited number of projects are paid through a portion of the sewer fees dedicated to drainage projects, as described on the City's sewer bills. Other Reno storm water improvements have historically been paid for by the general fund. The City of Reno is exploring the possibility of a storm water utility district to fund ~~capitol~~capital improvements. (COR) Sparks maintains a storm drain utility supported by user and connection fees, bond proceeds, grants and participation from other agencies.

Washoe County's storm water management program is administered by its Public Works Department, including maintenance of the storm drainage system which is provided by the Roads Division and funded through the general fund. Capital improvements are also funded through the general fund. The Department of Public Works is also exploring the possibility of establishing a storm water utility district to serve the unincorporated County. (WC)

For private development within Reno, Sparks or the unincorporated County, citizens, developers, engineers and planners typically interact with the Community Development Departments, which are responsible for plan review, permitting, development code enforcement and requests for FEMA flood map revisions.

### **5.7.2 Flood Plain Management**

A community's agreement to adopt and enforce flood plain management ordinances, particularly with respect to new construction, is an important element in making flood insurance available through the NFIP to home and business owners. See Section 5.3.2 above.

Local storm water drainage programs manage local and regional components of drainage planning and drainage issues; interact with FEMA for flood map updates; design and construct publicly-funded projects; and serve as repositories for FEMA flood map information. Each jurisdiction has designated a person as flood plain management administrator for FEMA purposes.

In 2003, the RWPC approved as a working document, the draft *Regional Flood Plain Management Strategy* (“RFMS”), which may serve as the basis for a flood plain management plan required by the ACOE before entering into a project cost agreement. Some elements of the RFMS have been included in the County’s *All Hazard Mitigation Plan*, required of all communities under the Disaster Mitigation act of 2000, while others have been used by the County to qualify for participation in the FEMA CRS.

### **5.7.3 Truckee Meadows Regional Drainage Manual**

In an effort to provide consistent guidance for developers, planners and engineers, key staff members of Reno, Sparks and County Public Works Departments and the Flood Project collaborated on the development of the *Truckee Meadows Regional Drainage Manual* (2009) (“TMRDM”). The purpose of the manual is to provide minimum standards for (and to ensure consistency with) analysis, planning and design of projects with flood control and drainage components within Reno, Sparks and the unincorporated County.

The manual is a common reference for policies and criteria relating to drainage design and hydrology for the three jurisdictions. The manual supports the jurisdictions’ regulation of future development and regional flood plain management, providing an integrated system which acts to protect public health, safety, comfort, convenience, welfare, property and commerce. The manual was reviewed by development community stakeholders and revised accordingly before being submitted for approval. Reno, Sparks and Washoe County Public Works Departments have provided endorsements and the manual is in use by all three jurisdictions. Reno references the manual in Chapter II of its Public Works Design Manual and Washoe County has adopted the manual by reference in Washoe County Code Chapter 110, Article 420.

The TMRDM updates and supersedes the 1996 draft *Washoe County Hydrologic Criteria and Drainage Design Manual* by using current state-of-the-art technology and procedures, and including updated technical references, charts and graphics. The new manual includes criteria that are more representative of Reno, Sparks and Washoe County programs, either by use of the same standards, or by specific identification of subjects in which criteria differ, such as rainfall criteria for Reno, unincorporated Washoe County and Sparks. The manual also updates chapters on open channels, including a new section on natural channel design and storm sewer systems, particularly with respect to capacity and design criteria.

### **5.7.4 Draft Washoe County Regional Flood Control Master Plan**

The draft *Washoe County Regional Flood Control Master Plan* (WRC, 2005) was prepared to update the *Washoe County Flood Control Master Plan, Concept Level Report* (KJC, 1991). The purpose of the 2005 update was to evaluate existing and projected drainage and flooding conditions and to recommend regional drainage facilities that can effectively reduce future flood damages within the region. This plan is separate from, and does not include, the Flood Project. The draft Plan serves as general guidance for the local governments as watershed- and project-specific master plans are developed. It also provides planning-level cost estimates for recommended flood and drainage facilities. [\(WC review\)](#)

### **5.7.5 Flood Plain Storage Outside the Truckee River Watershed**

Flood plain storage mitigation outside the Truckee River watershed is addressed by the following policy:

### ***Policy 3.1.c: Flood Plain Storage outside of the Truckee River Watershed***

*As appropriate, the local flood management staff will work with proposed project applicants or proposed land use applicants to identify the best approach to mitigate the impacts of changes to 100-year flood peaks and flood plain storage volume that are a result of proposed land use changes or proposed projects.*

**Criteria to implement policy:** The local flood management staff shall evaluate impacts using qualitative or quantitative analysis according to applicable local codes and ordinances. A more in-depth analysis will be required when significant impacts must be mitigated. Local flood management staff will develop guidelines for evaluation and mitigation of impacts in specific closed basins. In multi-jurisdictional basins such guidelines will be developed with the concurrence of all responsible agencies.

### ***5.8 Flood Control and Drainage Overview by Hydrographic Basin***

This section provides overviews of potential flood control and drainage issues relative to the Truckee Meadows Service Areas (“TMSA”) in hydrographic basins outside of the Truckee Meadows. Two comprehensive reports, one prepared for Sparks (Stantec, 2008) and the other for Reno and Washoe County (ECO:LOGIC, 2007), provide more detail on certain areas. Some of the following sections summarize information presented in the two reports referenced above, while others rely on other information sources or describe recently completed or ongoing work.

#### ***5.8.1 Spanish Springs Valley Hydrographic Basin***

A basin-wide master plan and hydrologic / hydraulic model has been developed for Spanish Springs. When new projects are proposed within the Sparks Sphere of Influence area, project proponents must demonstrate that proposed new facilities are adequate both for existing and build-out conditions. Management strategies in the unincorporated area are moving towards the same methodology. The Regional Hydrologic Model will greatly improve the ability to monitor watershed impacts due to land use change and develop appropriate design criteria for development.

Key components of the master-planned facilities are planned for construction within the unincorporated area. Construction of these facilities is critical to ensure that the capacity of the Spanish Springs Detention Facility in Sparks is not exceeded during flood events.

A funding mechanism for flood control facilities in the unincorporated area is essential. Proposals for new development in the unincorporated area need to be evaluated from a regional perspective to ensure that the effects of increased runoff are manageable within existing facility constraints downstream. The tools used for evaluation should be agreeable to both Washoe County and Sparks.

In 2002 and 2005, severe thunderstorm events caused significant flooding along the east and west foothill areas of Spanish Springs Valley. In the unincorporated area of west Spanish Springs, residential structures and property, Spanish Springs High School, private drainage systems owned and maintained by homeowner associations, and public roadways and drainage systems were significantly affected by large quantities of sediment-laden runoff. Culverts and ditches at many locations were either overtopped due to excessive flow or the capacity was

compromised due to sediment clogging. Roadways located at the lowest point of the watershed were flooded to depths of up to three feet.

A 2008 hydrologic study of the area prepared for Washoe County by Gray and Associates identified a suite of proposed drainage improvements ranging from sediment and detention basin upgrades located along the west boundary of the residential subdivisions both north and south of Eagle Canyon Boulevard and culvert upgrades at several road crossings. The analysis assumes a 100-year design storm; however, the final analysis will determine the appropriate design storm to optimize the cost versus benefit of the project.

### ***5.8.2 Truckee Canyon Hydrographic Basin (Verdi)***

A comprehensive flood control master plan for this hydrographic basin has not been developed. Significant changes to land use would require the development of such a plan and an evaluation of the possible impacts to the Truckee River flood plain in the Truckee Meadows. The *Somersett Development Storm Drainage Master Plan*, prepared in 2004 for Reno by Manhard Consulting, is being implemented as development progresses. The Regional Hydrologic Model will greatly improve the ability to monitor watershed impacts due to land use change, support the development of flood control master plans, and develop appropriate design criteria for development.

### ***5.8.3 Lemmon Valley Hydrographic Basins***

Lemmon Valley consists of two topographically closed hydrographic basins. Runoff in the West Lemmon Valley basin drains to the Silver Lake playa and the Swan Lake playa receives drainage from the ~~east~~ East Lemmon Valley basin. Playas have no outlet; therefore, runoff that drains to these lakes must either infiltrate or evaporate. Hydrologic studies have been prepared for the Silver Lake and Swan Lake drainage basins. A drainage master plan for Stead, Nevada (Stantec Consulting, 2002) has been prepared for Reno to provide a comprehensive drainage document specifically for the Lemmon Valley hydrographic basin to identify present condition flooding and problem areas so that capital flood improvements could be scheduled.

In 2007, Quad Knopf Consulting Engineers prepared a report for Reno entitled *North Valleys Flood Control Hydrologic Analysis and Mitigation Options*. The purpose of the report was to evaluate the impact of development in the Silver Lake and Swan Lake watersheds since 1987, and the effect of updated precipitation data on the projected water surface elevations in these playa lakes. The existing computed water surface elevation in the Swan Lake basin is below the existing FEMA 100-year base flood elevation ("BFE"); however, existing conditions in the Silver Lake basin are reported to be approximately three feet above the existing BFE. The study recommends as the preferred mitigation option, the submittal of an application for a Letter of Map Revision ("LOMR") to raise the FEMA BFE in Silver Lake to reflect current conditions. The preferred option also included a public outreach program, which was completed in December 2008. The formal application process for a LOMR request with FEMA was started in February 2009.

The Marlin Channel (located in Golden Valley, an east Lemmon Valley sub-basin) and Lemmon Drive Channel ("Lemmon Channel") have a history of flooding during significant flood events, most recently in December 2005. Drainage from the Marlin Channel combines with runoff from other tributary areas and flows to the Lemmon Channel. The total contributory watershed to the Lemmon Channel is estimated at 10.9 square miles, which is about 25 percent of the approximately 40 square mile total watershed draining to Swan Lake. The *Marlin and Lemmon*

*Channels, Flood Plain Analysis and Improvement Alternatives* report, prepared for Washoe County Public Works Department by Manhard Consulting, Ltd., concluded that a flood detention project on the Marlin Channel would provide significant flood hazard risk reduction for a small number of properties, however, the cost of a complete solution for the Lemmon Channel would likely outweigh the avoided damages.

#### ***5.8.4 Pleasant Valley Basin***

Alternatives to address flood problems at the Toll Road – Bailey Creek crossing were developed for Washoe County by Wood Rogers (2007). Sediment basins, channel improvements and a conveyance channel are among the recommended alternatives. Washoe County has initiated the right of way application process with the BLM for the sediment basin locations. The Regional Transportation Commission has plans to realign the South Virginia Street – Highway 341 intersection that will include flood control improvements required to address the need for the recommended channel improvements and a conveyance channel.

#### ***5.8.5 Warm Springs Valley Hydrographic Basin***

The limited development potential within this hydrographic basin minimizes flood control issues. Flood control requirements for the Specific Plan Area will be incorporated into project development plans. When single-family homes are constructed on large lots, consideration should be given to the potential of flood hazards that may not have been mapped by FEMA.

#### ***5.8.6 Sun Valley Hydrographic Basin***

A storm water master plan was completed for Sun Valley in the late 1990s that includes the identification of drainage improvements required to route flows from a 10-year recurrence interval storm event, and an evaluation of the possible impacts to the Wildcreek Golf Course dam that could result from a 100-year, 6-hour storm event. Further flood control planning is not anticipated to be required in this hydrographic basin unless there are significant changes to approved land uses.

#### ***5.8.7 Washoe Valley Hydrographic Basin***

There are a number of flood hazards within this hydrographic basin, including alluvial fan flooding, lake flooding during wet years, and riverine flooding of creeks and landslides. A comprehensive flood control master plan for this hydrographic basin has not been developed; however, an east Washoe Valley flood control master plan has been developed by Washoe County. To date, funding has not been available to implement the plan recommendations.

#### ***5.8.8 Antelope Valley Hydrographic Basin***

The limited development potential of this hydrographic basin has not justified significant planning for flood control. An analysis of the potential for flood hazards that might not have been mapped by FEMA should be performed when projects for development are proposed.

#### ***5.8.9 Bedell Flat Hydrographic Basin***

The limited development potential of this hydrographic basin has not justified significant planning for flood control. An analysis of the potential for flood hazards that might not have been mapped by FEMA should be performed when projects for development are proposed.

#### ***5.8.10 Dry Valley Hydrographic Basin***

The limited development potential of this hydrographic basin has not justified significant planning for flood control. An analysis of the potential for flood hazards that might not have been mapped by FEMA should be performed when projects for development are proposed.

#### ***5.8.11 Red Rock Valley Hydrographic Basin***

The limited development potential of this hydrographic basin has not justified significant planning for flood control. An analysis of the potential for flood hazards that might not have been mapped by FEMA should be performed when additional projects for development are proposed.

#### ***5.8.12 Cold Springs Valley Hydrographic Basin***

Cold Springs Valley is a topographically closed basin. Imported water and precipitation that falls within the basin generally stays within the basin. Hydrologic studies have been prepared for the White Lake drainage basin. Future changes to flood peaks and flood plain storage volume will need to be evaluated to ensure that the effects of increased volumes of runoff are manageable. A Letter of Map Revision for White Lake effective August 11, 2010 establishes a 100-year water surface elevation. In addition, Reno has identified a future condition flood advisory area for the White Lake Playa, available on [www.reno.gov](http://www.reno.gov).

## **References Cited**

- ECO:LOGIC Engineering, 2007, *City of Reno and Washoe County TMSA/FSA Water Wastewater and Flood Management Facility Plan*, prepared for the City of Reno, Washoe County and the Regional Water Planning Commission.
- ECO:LOGIC Engineering, 2002, *South Truckee Meadows Facility Plan*, prepared for Regional Water Planning Commission, Washoe County Department of Water Resources and South Truckee Meadows General Improvement District.
- Goodwin, Victor, 1977, *Central Lahontan Basin: flood chronology, Truckee River sub-basin, 1861-1976*, US Dept. of Agriculture, Forest Service report, water and related land resources.
- Gray and Associates, 2008, *West Spanish Springs Hydrologic Analysis*, prepared for Washoe County Department of Public Works.
- Kennedy/Jenks/Chilton, 1991, *Washoe County Flood Control Master Plan Concept Level Report – Volume 1*, prepared in association with Kato & Warren, Inc. and FCS Group, Inc. for Washoe County, City of Reno, City of Sparks.
- Manhard Consulting, Ltd., 2010, *Marlin and Lemmon Channels Flood plain Analysis and Improvement Alternatives*, prepared for Washoe County Public Works Department.
- Manhard Consulting, Ltd., 2004, *Somerset Development Storm Drainage Master Plan*, prepared for the City of Reno.
- Nevada Bureau of Mines and Geology, 2007, *Assessment of Risks and Vulnerability to Flood Hazards in Nevada, Open-File Report 07-2, in State of Nevada Hazard Mitigation Plan*.
- Nevada Bureau of Mines and Geology, 1998, *The 1997 New Year's Floods in Western Nevada, Special Publication 23*, published in cooperation with the US Geological Survey and the University of Nevada Cooperative Extension.
- Nevada Division of Water Planning, 1997, *The Flood of 1997*.
- Nimbus Engineers and Moore Iacofano Goltsman, 2004, *Flood Storage Volume Mitigation for Zones 1 and 2*, prepared for Regional Water Planning Commission.
- Quad Knopf Consulting Engineers, 2007, *North Valleys Flood Control Hydrologic Analysis and Mitigation Options*, prepared for the City of Reno and the Regional Water Planning Commission.
- Regional Water Planning Commission, 2003, *Regional Flood Plain Management Strategy*, prepared by the Flood Plain Management Subcommittee for the Regional Water Planning Commission.
- Stantec Consulting, 2008, *City of Sparks TMSA/FSA Conceptual Facility Master Plan*, prepared for the City of Sparks and the Regional Water Planning Commission.
- Stantec Consulting, 2002, *Drainage Master Plan for Stead, Nevada*, prepared for the City of Reno.
- Truckee River Water Management Council, 1997, unpublished report.
- Washoe County, 2009, *Truckee Meadows Regional Drainage Manual*.
- Washoe County, 1996, *Draft Hydrologic Criteria and Drainage Design Manual*.
- Washoe County Department of Water Resources, 1997, *1995–2015 Washoe County Comprehensive Regional Water Management Plan*.

Western Governors Association, 1997, *An Action Plan for Reducing Flood Risk in the West*.

Wood Rogers, 2007, *Geiger Grade / Toll Road Flood Control Project – Formulation and Evaluation of Alternatives (Jan. 2007) and Bailey Canyon Creek Flood Control Project – 30 Percent Design Report for the Channel Improvements from Toll Road to Steamboat Creek*.

WRC Engineering, Inc., 2005, *Draft Washoe County Regional Flood Control Master Plan*, prepared for the Regional Water Planning Commission.

WRC Nevada, Inc., 2003, *Truckee River Flood Plain Flood Storage Impact Analysis*, prepared for Washoe County Department of Water Resources.

# Northern Nevada Water Planning Commission

## STAFF REPORT

**DATE:** February 23, 2015

**TO:** Chairman and Members, Northern Nevada Water Planning Commission (“NNWPC”)

**FROM:** Chris Wessel, NNWPC Water Management Planner  
Jim Smitherman, NNWPC Water Resources Program Manager

**SUBJECT:** Presentation of comments received on the “Water Purveyor’s” chapter for the 2016 Regional Water Management Plan (“RWMP”) update; discussion and possible direction to staff.

---

### SUMMARY

Since the February 4, 2015 NNWPC meeting, when Chapter 3 was introduced, staff has received comments from Edmund Quaglieri of the Nevada Public Utilities Commission (“PUC”). Specifically, Mr. Quaglieri has provided updates to *Table 3-4 2014 Private Purveyor Capacities* and *Table 3-5 Public Water Systems in Washoe County* as well as revisions to *Section 3.3.4 Other PUC Regulated Water Systems* (see attached).

Kim Davis from the Nevada Division of Water Resources and Chris Anderson of the Washoe County Health District both submitted databases of private water companies. Staff is currently in the process of comparing both databases with the information provided in the 2011 RWMP and will update the list of water systems accordingly.

Staff still anticipates significant revisions by the Truckee Meadows Water Authority (“TMWA”) to elements of sections *3.1 Public Water Purveyors*, *3.2 Public Water Purveyor Consolidation Analysis* and *3.6 Water Rights Requirements*. These changes are not expected to be available until after the release of TMWA’s water resource plan

Staff will provide a verbal progress report at the NNWPC meeting.

### RECOMMENDATION

Staff recommends that the NNWPC accept the report on comments received and proposed revisions to the “Water Purveyor’s” chapter for the 2016 RWMP update, and provide direction to staff as appropriate concerning this chapter as part of the development of the 2016 RWMP.

CW:jd

Attachment: Chapter 3 proposed amendments

## Chapter 3 proposed amendments

### 3.3 Other Non-Public Water Purveyors

Numerous privately owned and operated water utilities exist within the Planning Area. While the majority of these small water systems are owned and operated by individuals or businesses, and are regulated solely through the WCDHD, several fall under the oversight of the Public Utilities Commission of Nevada ("PUC").

#### **Public Utilities Commission of Nevada**

PUC operates under portions of enabling legislation of the Nevada Revised Statutes ("NRS") and Nevada Administrative Code ("NAC"), Chapter 704 and is intended to provide a means of impartial regulation for both the utility and the customer. PUC regulates non public [?] water and wastewater utilities serving approximately [24,000?] customers in Nevada and is responsible for ensuring that water utilities deliver clean, safe, and reliable water to their customers at reasonable rates. The PUC's role is: 1) To provide for fair and impartial regulation of public utilities; 2) To provide for the safe, economic, efficient, prudent and reliable operation and service of public utilities; and 3) To balance the interests of customers and shareholders of public utilities by providing customers with just and reasonable rates.

Regulation under PUC is required for all non-municipal utilities having systems which serve more than 25 customers and have sales in excess \$25,000 within any preceding 12-month period. The three largest PUC regulated systems within the Planning Area are listed in Table 3-4. The table shows the approximate number of services for each private purveyor, water sources, approximate 2009-2014 calendar year water deliveries, water demands and facility capacities where available.

#### **3.3.1 Utilities Inc. of Nevada**

Utilities Inc. of Nevada operates the water system in the Cold Springs area of Reno. The system consists of five wells and four storage reservoirs having a total capacity of 2,260,000 gallons.

#### **3.3.2 Sky Ranch Water Service Corp.**

The Sky Ranch Water Service Corp. operates the Sky Ranch water system in Spanish Springs Valley. The system consists of two wells and three storage tanks having a storage capacity of approximately 830,000 gallons.

**Table 3-4 2009-2014 Private Purveyor Capacities**

Water Purveyor	Year-End Active Connection*	Water Source	2009-2014 Deliveries * (afa)	Average Daily Demand * (MGD)	Peak Day Demand * (MGD)	Number of Tanks/Reservoirs	Total Storage Capacity (MG)
Utilities Inc. of Nevada	3,290,316	5 wells	1,430,140 0	1.31,25	2.82,69	4 Tanks	2.26
Sky Ranch Water Service Corp.	580	2 wells	620,608	0.5	1.41,5	3 Tanks	0.8
Steamboat Springs Water Works, Inc	290,265	3 wells	160,171	0.15	0.25,24	2 Tanks	0.42

\* Indicates values are approximate; afa – Acre feet per Annum (year); MG – Million Gallons; MGD – Million Gallons per Day

**3.3.3 Steamboat Springs Water Works, Inc.**

Steamboat Springs Water Works, Inc. operates the water system in the Steamboat Hot Springs area south of Reno. The utility has potable water wells in close proximity to geothermal wells used to generate electrical energy and to supply a spa. The utility provides water to approximately 290-265 services with the potential to add 40 acres of undeveloped land to its service area.

**3.3.4 Other PUC Regulated Water Systems**

Verdi Meadows Utility Company, Inc. owns three wells, but only operates two wells and serves 175 customers in the Verdi area. Silver Knolls Mutual Water Company operates two wells and serves 64 customers in Lemmon Valley. Rosemount Water Company provides spring water to 26 active connections in the Mount Rose area. Verdi Mutual Water Company provides spring water to 8 active connections in the Verdi area. Reno Technology Park operates two wells and serves one large industrial customer east of Reno near Lockwood, NV.

~~Verdi Meadows Utility Company, Inc. operates three wells and serves 172 customers in the Verdi area. Silver Knolls Mutual Water Company operates two wells and serves 60 customers in Lemmon Valley. Rosemount Water Company provides spring water to 23 active connections in the Mount Rose area. Verdi Mutual Water Company provides spring water to several businesses and domestic parcels in the Verdi area.~~

**Public Water Systems List**

In addition to those described above, numerous small, privately-owned and operated, public water systems exist in Washoe County. These systems typically provide service to schools, parks, multi-residential properties (such as apartment complexes and mobile home parks), commercial businesses and special government facilities, for which municipal services were not available at the time of development. These systems fall under the oversight of the WCDHD. A current list of water systems that are in operation within the Planning Area appears in Table 3-5.

**Table 3-5 Public Water Systems in Washoe County**


---

4 <sup>th</sup> Street Bistro	Mount Rose Bowl HOA
Ace Apartments	Mount Rose Water Company
Air Base Inn	Mount Rose Campground
Air Sailing Gliderport	Mount Rose Ski Area
Arrowhead Mobile Home Park	NDOT Wadsworth Rest Stop
Bar M Bar	New Washoe City County Park
Biglieri Water System	North Valley Business Facility
Boomtown Hotel and Casino	Old Forty West Motel
Bowers Mansion County Park	Old Washoe Station
Bristlecone Family Resources	Pleasant Valley School
Chuck's Circle C Market	Reno Sahara Trailer Park
Conestoga Mobile Home Park	River Bend Mobile Home Park
Crosby's Lodge	Riverbelle Properties-Cedars
Crystal Peak County Park	Riverbelle Properties MHP
Crystal Trailer Park	Sage Trailer Park
Davis Creek County Park	Silver Spur Motel
Dutch Wife Motel	Sky Tavern (City of Reno)
Foothill Trailer Park	Slide Mountain Ski Area
Franktown Meadows	Saint James
Gold Ranch Casino	The Lodge at Galena
Golden Valley County Park	Thomas Creek Estates Water Co.
Grand View Terrace Water District	Timberline Estates
Hawk's Nest Bar	Truckee Canyon Water System
Horizon Hills GID	Verdi Business Park Water Co-op
J and K Hoffman	Verdi School
Jackson Food Store #23	Washoe Grill
Johnny's Little Italy Restaurant	Washoe Lake State Park
Ke Ta Mobile Home Park	Washoe Lake State Park, boat ramp
Lemmon Valley Horseman's Park	Washoe Regional Shooting Range
Magic Carpet Golf	Webb Mobile Home Park
Mel's Diner	Westerner Motel
Merry Wink Motel	

---

# Northern Nevada Water Planning Commission

## STAFF REPORT

**DATE:** February 23, 2015

**TO:** Chairman and Members, Northern Nevada Water Planning Commission (“NNWPC”)

**FROM:** Chris Wessel, NNWPC Water Management Planner  
Jim Smitherman, NNWPC Water Resources Program Manager

**SUBJECT:** Presentation of comments received on the “Conservation” chapter for the 2016 Regional Water Management Plan (“RWMP”) update; discussion and possible direction to staff.

---

### **SUMMARY**

Since the February 4, 2015 NNWPC meeting, when Chapter 7 was introduced, staff has contacted Kim Davis from the Nevada Division of Water Resources (“NDWR”), and Edmund Quaglieri of the Nevada Public Utilities Commission (“PUC”) for input. Both provided updated language for Section 7.4.3 State of Nevada Conservation Objectives (see attached)

Darren Price of the Sun Valley General Improvement District (“SVGID”) has provided customer service statistics for Section 7.3 *Measuring Progress* (see attached). Staff anticipates SVGID will provide expanded descriptions of its efforts discussed in Section 7.4.3 *State of Nevada Conservation Objectives*.

Staff anticipates significant revisions by the Truckee Meadows Water Authority to elements of Sections 7.3 *Measuring Progress*, 7.4 *Laws, Ordinances, Agreements and Plans Facilitating Conservation*, 7.5 *Ongoing Measures to Conserve Water*, and 7.7 *Drought*.

Staff will provide a verbal progress report at the NNWPC meeting.

### **RECOMMENDATION**

Staff recommends that the NNWPC accept the report on comments received and proposed revisions to the “Conservation” chapter for the 2016 RWMP update, and provide direction to staff as appropriate concerning this chapter as part of the development of the 2016 RWMP.

CW:jd

Attachment: Chapter 7 proposed amendments

## **Chapter 7 proposed amendments**

### **7.4.3 State of Nevada Conservation Objectives** *(Proposed Changes by NDWR and PUC)*

In order to meet the requirements of NRS 540.131 through NRS 540.151, all purveyors of water for municipal, industrial, or domestic purposes, with the exception of certain smaller purveyors, filed water conservation plans, most in 1992, with the Nevada Department of Conservation and Natural Resources for approval and adoption by the state. Amendments in 2005 to NRS 540.131 require conservation plans to be updated every five years. Water purveyors subject to the regulation of the Nevada Public Utilities Commission (“PUCN”) are required to gain approval of their water conservation plan from the PUCN that meets the requirements of NRS 704.662 to 704.6624. Per NRS 540.121 (3) the investor-owned water purveyors are not required to gain approval through the Nevada Division of Water Resources (“NDWR”), who currently approves the remaining water conservation plans.

In 1993, the State Department of Conservation and Natural Resources imposed minimum standards for plumbing fixtures in new construction and expansions in residential, industrial, commercial and public buildings, mobile homes, and manufactured homes and buildings. These standards include maximum acceptable water use by toilets, urinals, and showers; banning timing devices that cause fixtures to flush periodically, irrespective of demand; limiting the flow rate of faucets in kitchens and lavatories; and prohibiting multiple faucets activated from a single point. These standards supersede the conservation plans described below. Portions of the conservation plans outlined below were also superseded by local ordinances adopted by Reno, Sparks and Washoe County in support of the Water Conservation Agreement discussed in the previous section.

The following Washoe County water purveyors’ conservation plans are on file with the NDWR: TMWA, Sun Valley General Improvement District (“SVGID”), Sky Ranch Water Service, Utilities Incorporated of Nevada, Silver Knolls Mutual Water Company, Rosemount Water Company, Verdi Mutual Water Company, and a number of other very small systems. Refer to the following website for a full list of plans currently available for viewing: <http://water.nv.gov/programs/planning/plans.cfm>~~The following water purveyors’ conservation plans are on file with the State Department of Conservation and Natural Resources: TMWA, Sun Valley General Improvement District (“SVGID”), Lemmon Valley Mobile Village, Oasis Mobile Estates, Panther Valley Water Users Association, Sierra Spring Water Company, Silver Knolls Mutual Water Company, and Verdi Mutual Water Company.~~(Update)

**7.3 Measuring Progress** *Proposed Changes by SVGID*

Figure 7-4-2 shows a similarly stable use-per-connection trend for ~~Washoe County Department of Water Resources (“WCDWR”)~~ Sun Valley General Improvement District (“SVGID”) customers over the last eight years. A comparison of pre-drought and post-drought use is not available for this Plan.

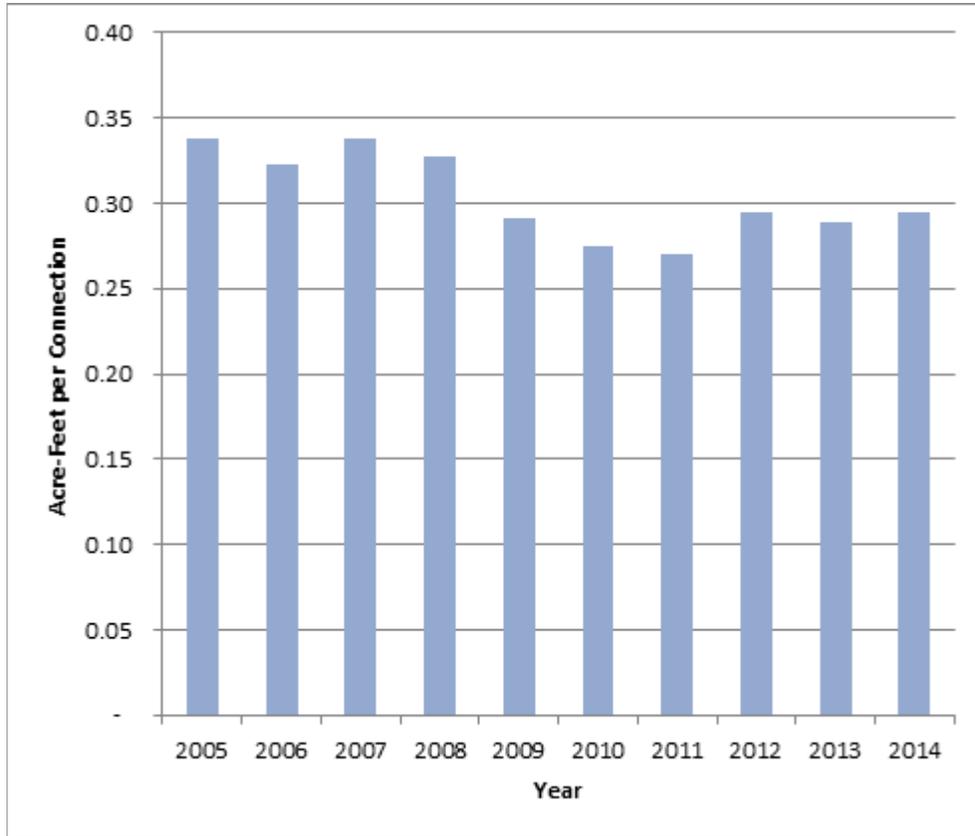


Figure 7-2 ~~WCDWR-SVGID~~ Use per Connection ~~1995-2009~~ 2005-2014

# Northern Nevada Water Planning Commission

## STAFF REPORT

**DATE:** February 26, 2015  
**TO:** Chairman and Members, Northern Nevada Water Planning Commission (“NNWPC”)  
**FROM:** Jim Smitherman, NNWPC Water Resources Program Manager  
**SUBJECT:** Discussion and possible direction to staff regarding any chapters of the Regional Water Management Plan (“RWMP”) previously reviewed by the NNWPC in relation to the 2016 RWMP update.

---

### SUMMARY

This agenda item is intended to be one in a series of standing items, ending upon the NNWPC’s final recommendation to the Western Regional Water Commission concerning the 2016 RWMP update. Under this item, NNWPC members may discuss, and the NNWPC may direct staff on the subjects of any of the RWMP chapters reviewed, since the December 2014 meeting, in relation to the 2016 update.

JS:jd

# Northern Nevada Water Planning Commission

## STAFF REPORT

**DATE:** February 26, 2015  
**TO:** Chairman and Members, Northern Nevada Water Planning Commission (“NNWPC”)  
**FROM:** John Rhodes, Legal Counsel  
**SUBJECT:** Report on legislative activities, including Bill Draft Requests ("BDR's") and Bills pending in the 2015 session of the Nevada Legislature, as February 20, 2015, that may affect or are of interest to the Western Regional Water Commission (“WRWC”) / Northern Nevada Water Planning Commission (“NNWPC”)

---

The following staff report lists BDR's and Bills pending in the 2015 Nevada Legislature that may affect or are of interest to the WRWC and NNWPC. No additional language is available for the BDR's at this time. Pending Bills are noted with an Assembly ("AB") or Senate ("SB") designation, and the complete language of each Bill is available by clicking on the corresponding link contained in the electronic version of this report. The dates following the BDR number in parentheses on all Bills indicate the date the Bill was introduced. WRWC staff and the WRWC Legislative Subcommittee will track these Bills, recommend positions to be taken, and provided periodic updates to the WRWC and NNWPC.

**Bill Drafts Requested and Bills Introduced**

**Water Issues**

**BDR / Requestor, or  
Bill / Requestor**

<p><b>48-253 Assemblyman Ohrenschall</b> Revises provisions relating to water resources. (7/31/14)</p>	<p>Subcommittee Position Watch</p>
<p><b>SB65 Water Resources, Division of Conservation and Natural Resources</b> Makes various changes relating to the adjudication of vested water rights, appropriation of public waters, underground water and wells and planning and development of water resources. (BDR 48-366, 12/20/14)</p>	<p>Subcommittee Position Neutral / Watch</p>
<p><b>SB81 Water Resources, Division of Conservation and Natural Resources</b> Revises provisions governing groundwater management plans and critical management areas. (BDR 48-367, 12/20/14)</p>	<p>Subcommittee Position Neutral / Watch</p>
<p><b>481 Legislative Committee on Public Lands (NRS 218E.510)</b> Creates a statewide committee to study present and future supplies of water and allocation levels in Nevada. (9/1/14)</p>	<p>Subcommittee Position Watch</p>
<p><b>708 Senate Committee on Government Affairs</b> Revises provisions relating to water.(12/9/14)</p>	<p>Subcommittee Position Watch</p>
<p><b>AB169 Assembly Committee on Health and Human Services</b> Provides for the collection and application of graywater for a single-family residence. (BDR 40-804, 2/17/15)</p>	<p>Subcommittee Position Neutral / Watch</p>
<p><b>48-253 Assemblyman Ohrenschall</b> Revises provisions relating to water resources (7/31/14)</p>	<p>Subcommittee Position Watch</p>
<p><b>S-805 Assemblyman Oscarson</b> Requires the Legislative Committee on Public Lands to conduct a study concerning water conservation and alternative sources of water for Nevada communities.(12/10/14)</p>	<p>Subcommittee Position Watch</p>

**928 Assembly Committee on Natural Resources, Agriculture, and Mining** Subcommittee Position  
Revises provisions governing the definition of "farm" for purposes of availability of water. Watch  
(12/10/14)

**483 Legislative Committee on Public Lands (NRS 218E.510)** Subcommittee Position  
Requests appropriation for a grant to support cloud seeding activities in Nevada. (9/1/14) Watch

**Open Meeting Issues**

**931 Assemblywoman Titus** Subcommittee Position  
Makes various changes relating to the Open Meeting Law. (12/10/14) Watch

**SB70 Attorney General** Subcommittee Position  
Revises provisions governing meetings of public bodies. (BDR 19-155, 12/20/14) Neutral / Watch

**Ethics Issues**

**23-19 Senator Smith** Subcommittee Position  
Revises provisions governing ethics in government. (10/16/13) Watch

**123 Assembly Committee on Legislative Operations and Elections** Subcommittee Position  
Makes various changes regarding transparency and ethics in government.(6/24/14) Watch

**AB60 Ethics, Commission on** Subcommittee Position  
Revises provisions of the Nevada Ethics in Government Law. (BDR 23-309, 12/20/14) Neutral / Watch

**Public Records Issues**

- |   |  |
|---|--|
| <p><b>19-157 Attorney General</b><br/>Revises provisions governing public records. (7/7/14)</p>   | <p>Subcommittee Position<br/>Watch</p>           |
| <p><b>SB28 Nevada League of Cities and Municipalities</b><br/>Clarifies provisions governing the fees that may be charged for providing copies of public records.<br/>(BDR 19-464,12/20/14)</p> | <p>Subcommittee Position<br/>Neutral / Watch</p> |

**Other Issues of Interest**

- |   |  |
|---|--|
| <p><b>SB11 Senator Goicoechea</b><br/>Grants power to local governments to perform certain acts or duties which are not prohibited or limited by statute. (BDR 20-284, 12/20/14)</p>    | <p>Subcommittee Position<br/>Neutral / Watch</p> |
| <p><b>AB19 Nevada League of Cities and Municipalities</b><br/>Revises provisions governing timing of adoption of tentative budgets by local governments.<br/>(BDR 31-456, 12/20/14)</p> | <p>Subcommittee Position<br/>Neutral / Watch</p> |
| <p><b>SB149 Senator Atkinson</b><br/>Provides for a program of matching grants to local governments for the maintenance and repair of public works. (BDR 43-669, 2/12/15)</p>           | <p>Subcommittee Position<br/>Neutral / Watch</p> |
| <p><b>SB157 Senate Committee on Government Affairs</b><br/>Requires coordination between state and local government agencies. (BDR 22-706, 2/16/15)</p>                                 | <p>Subcommittee Position<br/>Neutral / Watch</p> |
| <p><b>S-730 Senator Hardy</b><br/>Revises provisions relating to local governmental entities. (12/9/14)</p>   | <p>Watch</p>                                     |
| <p><b>810 Assemblywoman Woodbury</b><br/>Makes various changes relating to local governments. (12/10/14)</p>  | <p>Subcommittee Position<br/>Watch</p>           |

# Northern Nevada Water Planning Commission

## STAFF REPORT

**DATE:** February 26, 2015  
**TO:** Chairman and Members, Northern Nevada Water Planning Commission  
**FROM:** Jim Smitherman, Water Resources Program Manager  
**SUBJECT:** Program Manager's Report

---

Attached are updated reports for items (a) and (b) for your review. A verbal report will be given for item (c).

- a) Report on the status of Projects and Work Plan supported by the Regional Water Management Fund;
- b) Financial Report on the Regional Water Management Fund; and
- c) Report on the TMRPA's parcel-based population and employment modeling project.

**Status Report of Projects and Work Plan  
Supported by the Regional Water Management Fund**

	<b>Project Name</b>	<b>Contractor / Provider</b>	<b>Amount</b>	<b>Contract #</b>	<b>Balance Remaining</b>	<b>Percent Complete</b>	<b>Target Completion Date</b>	<b>Notes</b>
1	Certified Landscape Technician Program 2014-2015 FY	Nevada Landscape Association (NLA)	25,000	WRWC 14-01	25,000	0%	6/30/15	New contract being developed
2	Cloud Seeding - Additional Precip Monitoring Equipment	(DRI) Desert Research Institute	25,000	WRWC 14-04	5,233	79%	6/30/15	Work is in progress
4	Cloud Seeding Program for Water Year 2015	(DRI) Desert Research Institute	100,000	WRWC 14-06	67,588	32%	6/30/15	Work is in progress
5	Effluent Management	City of Reno / Stantec	20,000	WRWC 14-08	20,000	0%	6/30/15	Work is in progress
6	Envision Videographers of WRWC meetings	Envision	1,200	MOU	690	43%	9/30/15	Work is in progress
7	Fifth Amendment to Reimburse TMWA and DWR for consolidation	DWR, TMWA	300,000	WRWC 10-03.3	300,000	0%	6/30/15	Work is in progress
8	Highland Canal Improvements	City of Reno	250,000	WRWC 14-01	250,000	0%	1 yr from Effective Date	Awaiting signatures from Reno
9	Optimizing Investments in the Truckee River Watershed	The Nature Conservancy	57,787	WRWC 14-07	57,787	0%	12/31/16	Work is in progress
10	Regional Data Development and	Truckee Meadows Regional Planning	486,000	WRWC 11-04	322,167	34%	6/30/16	Work is in progress
11	Regional Storm Water Quality Management Program (Third	City of Reno	262,500	WRWC 11-05-3	163,262	38%	6/30/15	Work is in progress
12	RWMP 2016 Cost & Finance Chapter Update	Hansford Economic Consultant	23,575	WRWC 15-01	23,575	0%	12/31/15	Work is in progress
13	RWMP 2016 Update - Water Balance Update	Stanted	25,000	WRWC 15-02	25,000	0%	6/30/15	Awaiting final signatures
14	Septic - Phase II	County - CSD	150,000	WRWC 13-06	141,552	6%	6/30/15	Work is in progress
15	Sosu TV Videographers of NNWPC meetings FY 2014-15	Sosu TV	3,500	Quote	2,520	28%	6/30/15	Work is in progress
16	TMDL Phase I Fifth Amendment	City of Reno (LimnoTech)	75,000	WRWC 08-12-5	74,680	0%	6/30/16	Work is in progress
17	TRIG Website Support FY 2014-2015	City of Reno	7,500	WRWC 12-06.2	7,063	6%	6/30/15	Work is in progress
18	TROA - 6,700 AF water rights purchase	TMWA	2,700,000	WRWC 13-05	609,186	77%	Open Ended	Work is in progress
19	Washoe ET Project Maintenance	DRI (Desert Research Institute)	10,000	WRWC 13-07	4,241	58%	6/30/15	Work is in progress
20	Washoe ET weather station upgrades	(DRI) Desert Research Institute	29,050	WRWC 14-02	25,777	11%	6/30/15	Work is in progress
21	Website support Fiscal Year 2014-15	Washoe County Technology Services	7,500	WRWC 11-07-01	7,500	0%		Awaiting signatures from Tech Svcs

2/26/2015  
 Fund 766  
 Report 400/ZF15  
 Fiscal Year 2015; Period 1 through 8

**Financial Report on the  
 Regional Water Management Fund**

<b>Accounts</b>	<b>Plan Budget</b>	<b>Actual (Revenue &amp; Expenses)</b>	<b>PO Commit (Remaining PO Balance)</b>	<b>Actual + PO</b>	<b>Available (Budget Minus Actual + PO)</b>	<b>Avail%</b>	<b>PreCommit (PO's Requested)</b>	<b>Available (Budget Minus PO Requisitions)</b>	<b>Avail%</b>
Interest-Pooled Inv.	27,760.00-	12,457.56-		12,457.56-	15,302.44-	55-		15,302.44-	55-
RGL Pooled Inv.		789.15-		789.15-	789.15			789.15	
URGL Pooled Inv.		6,836.62-		6,836.62-	6,836.62			6,836.62	
Water Surcharge 1.5%	1,533,311.00-	1,198,427.31-		1,198,427.31-	334,883.69-	22-		334,883.69-	22-
** REVENUE	1,561,071.00-	1,218,510.64-		1,218,510.64-	342,560.36-	22-		342,560.36-	22-
Professional Services	1,703,700.00	144,691.03	991,457.46	1,136,148.49	567,551.51	33		567,551.51	33
710110 Contracted/Temp Svcs	332,400.00	182,882.92		182,882.92	149,517.08	45		149,517.08	45
710120 Legal Fees	129,600.00	75,600.00	54,000.00	129,600.00					
WRWC Staff & Legal	462,000.00	258,482.92	54,000.00	312,482.92	149,517.08	44.98		149,517.08	44.98
Overhead - Prf Serv		33,676.07		33,676.07	33,676.07-			33,676.07-	
Fin Consult Services	10,000.00	8,500.00	8,500.00	17,000.00	7,000.00-	70-		7,000.00-	70-
Invest Pool Alloc Ex		941.42		941.42	941.42-			941.42-	
Lobbying Services	600.00	600.00		600.00					
Office Supplies		124.55		124.55	124.55-			124.55-	
Pmts to O Agencies	514,000.00	33,410.00	609,186.00	642,596.00	128,596.00-	25-		128,596.00-	25-
Telephone Land Lines		63.21		63.21	63.21-			63.21-	
Seminars and Meetings	1,000.00	295.69		295.69	704.31	70		704.31	70
Support Service - Reim		243.62		243.62	243.62-			243.62-	
Advertising	1,000.00				1,000.00	100		1,000.00	100
Undesignated Budget	40,000.00	75.00		75.00	39,925.00	100		39,925.00	100
Insurance Premium		3,269.00		3,269.00	3,269.00-			3,269.00-	
Travel	1,000.00				1,000.00	100		1,000.00	100
711400 Overhead - General Fund	1,265.00	843.34		843.34	421.66	33		421.66	33
711410 Overhead - Admin	44,924.95	26,206.22		26,206.22	18,718.73	42		18,718.73	42
711420 Overhead - Supply	16,690.58	9,061.40		9,061.40	7,629.18	46		7,629.18	46
Overhead	62,880.53	36,110.96		36,110.96	26,769.57	120.71		26,769.57	120.71
** EXPENDITURES	2,796,180.53	520,483.47	1,663,143.46	2,183,626.93	612,553.60	22		612,553.60	22
<b>*** Total</b>	<b>1,235,109.53</b>	<b>698,027.17-</b>	<b>1,663,143.46</b>	<b>965,116.29</b>	<b>269,993.24</b>	<b>22-</b>		<b>269,993.24</b>	<b>22-</b>

# Northern Nevada Water Planning Commission

## STAFF REPORT

DATE: February 26, 2015

TO: Chairman and Members, Northern Nevada Water Planning Commission

FROM: Jim Smitherman, Water Resources Program Manager

SUBJECT: Report on the Truckee Meadows Regional Planning Agency (“TMRPA”) parcel-based population and employment modeling project

---

Jim Smitherman, NNWPC Water Resources Program Manager, will provide a brief verbal report concerning the status of the TMRPA parcel-based population and employment modeling project.

JS:jd